

**FU1 thru FU5**Surface Mount Glass Passivated Superfast Rectifier
Reverse Voltage 50~600V Forward Current 1A

Features

- Glass passivated superfast recovery Rectifiers
- Very low profile - typical height of 1.0 mm
- Low forward voltage drop
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- AEC-Q101 qualified
- High temperature soldering guaranteed: 260 °C/10 seconds
- Halogen-free according to IEC 61249-2-21 definition

eSGA
(SOD-123FL)

Typical Applications

For use of general purpose rectification in lighting, cellular phone, portable device, power supplies and other consumer applications.

Maximum Ratings (TA = 25 °C unless otherwise noted)

| Parameter | Symbol | FU1 | FU2 | FU3 | FU4 | FU5 | Unit |
|--|----------|-----|-----|---------------|-----|-----|------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 200 | 400 | 600 | V |
| Maximum RMS voltage | VRMS | 35 | 70 | 140 | 280 | 420 | V |
| Maximum DC blocking voltage | VDC | 50 | 100 | 200 | 400 | 600 | V |
| Maximum average forward rectified current | IF(AV) | | | 1 | | | A |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load | IFSM | | | 30 | | | A |
| Operating junction and storage temperature range | TJ, TSTG | | | - 55 to + 150 | | | °C |

Electrical Characteristics (TA = 25 °C unless otherwise noted)

| Parameter | Test Conditions | Symbol | FU1 | FU2 | FU3 | FU4 | FU5 | Unit |
|---|---|------------------|-----|------|------------|-----|-----|-------|
| Maximum instantaneous forward voltage | 1 A | V _F | | 0.95 | | 1.3 | 1.7 | Volts |
| Maximum DC reverse current at rated DC blocking voltage | TA=25°C TA=125°C | I _R | | | 5.0 100 | | | µA |
| Maximum reverse recovery time | I _F =0.5A, I _R =1.0A, I _{rr} =0.25A | t _{rr} | | | 35 | | | nS |
| Typical junction capacitance | 4.0 V, 1 MHz | C _J | | 0.75 | | | | pF |
| Typical thermal resistance ¹⁾ | junction to ambient | R _{θJA} | | 66 | | | | °C/W |
| | junction to case | R _{θJC} | | 32 | | | | |
| | junction to mount | R _{θJM} | | 1 | | | | |

Note:1)The thermal resistance from junction to ambient,case or mount,mounted on P.C.B with 5×5mm copper pads,2 OZ,FR4 PCB

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

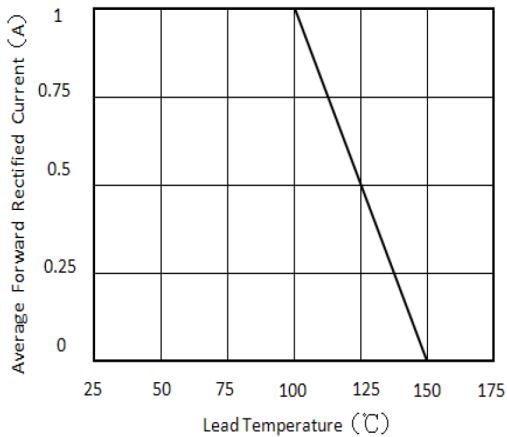


Figure 1. Forward Current Derating Curve

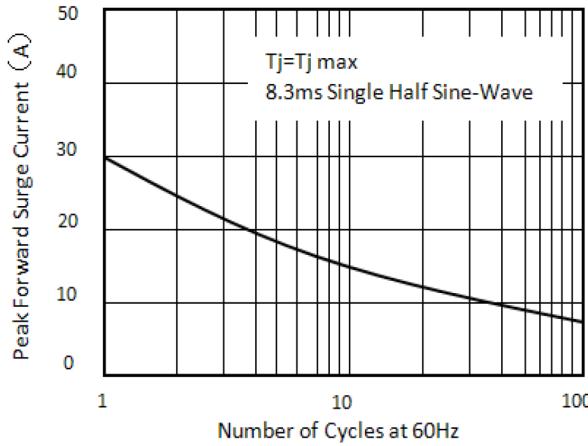


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

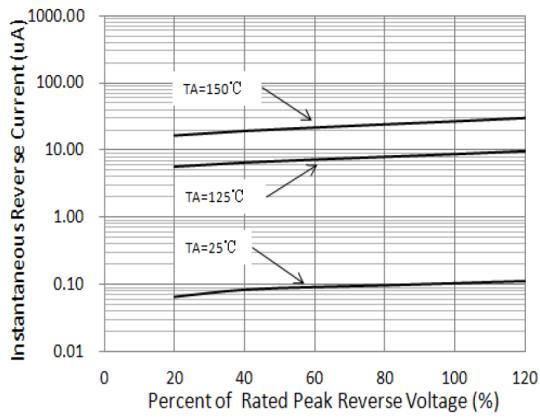


Figure 3. Typical Reverse Characteristics

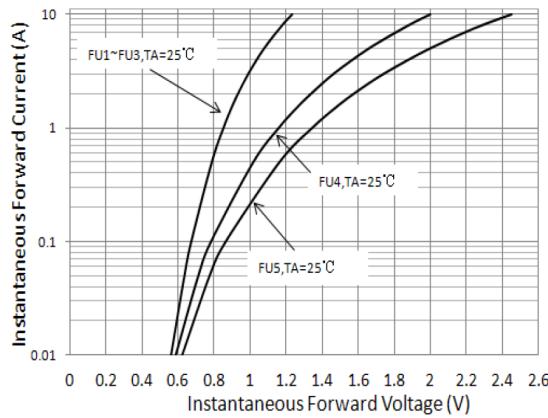


Figure 4. Typical Instantaneous Forward Characteristics





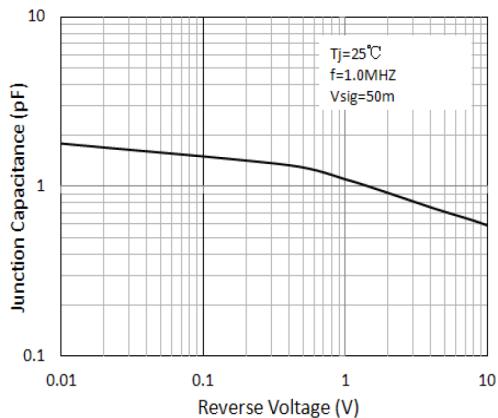


Figure 5. Typical Junction Capacitance

FU1 thru FU5


 Surface Mount Glass Passivated Superfast Rectifier
Reverse Voltage 50~600V Forward Current 1A

Package Outline Dimensions

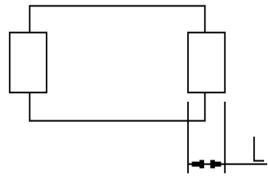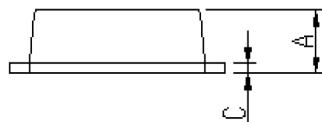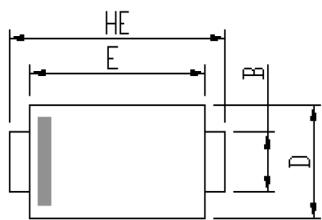

| DIM | Unit: mm | | Unit: inch | |
|-----|----------|------|------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.9 | 1.08 | 0.035 | 0.043 |
| A1 | 0 | 0.1 | 0.000 | 0.004 |
| B | 0.85 | 1.05 | 0.033 | 0.041 |
| C | 0.1 | 0.25 | 0.004 | 0.010 |
| D | 1.7 | 2 | 0.067 | 0.079 |
| E | 2.9 | 3.1 | 0.114 | 0.122 |
| L | 0.43 | 0.83 | 0.017 | 0.033 |
| HE | 3.5 | 3.9 | 0.138 | 0.154 |

Soldering footprint

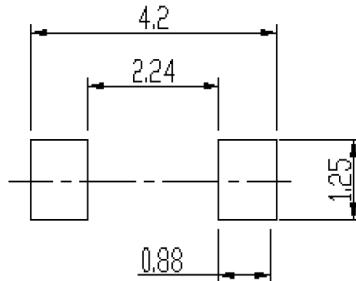

Packing Information

Packing quantities:

3000 pcs/Reel, 40 Reels/Box; 8mm Tape, 7" Reel

Tape & Reel Specification

