

Thin-Film RF/Microwave Filters

HP2816 Thin Film High Pass Filter


HP2816A1000SNTR 15W



ELECTRICAL CHARACTERISTICS

Parameter	Value	Unit	Notes
Fc	1000	MHz	
Insertion Loss @ 1000 MHz	-1.5	dB	
Rejection @ 750 MHz	-40	dB	
Return Loss @1000-1500MHz	-18	dB	
Return Loss @1500-2500MHz	-12	dB	
Power Handling	15	W	RF Continuous
Impedance	50	Ohm	
Operating Temp.	-40 to +85	degC	
Size	7x4x1.2mm		

TYPICAL ELECTRICAL PERFORMANCE

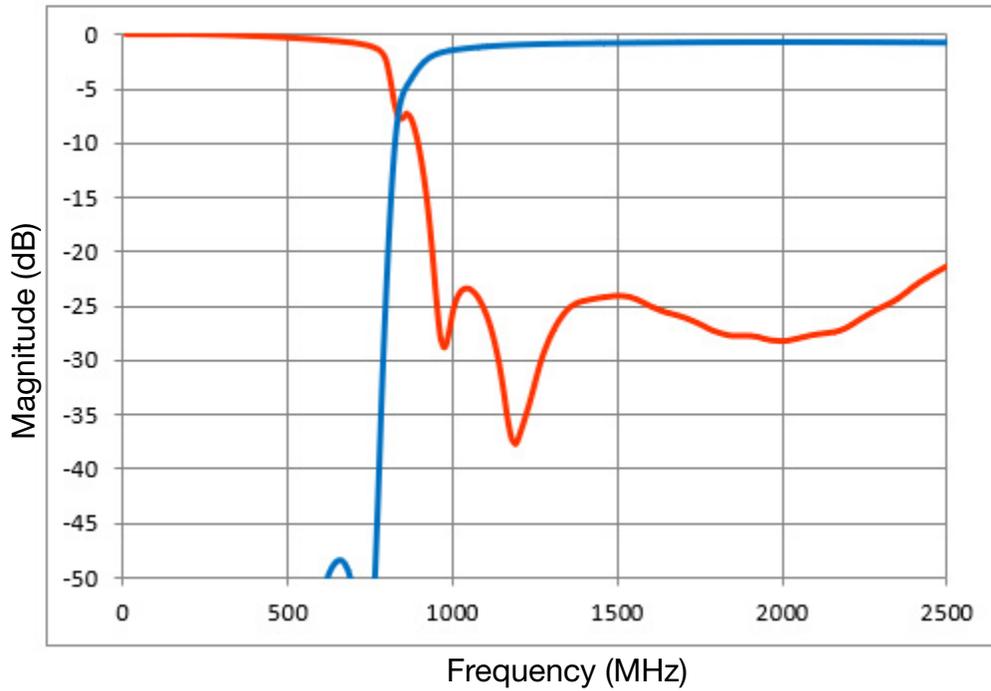

Thin-Film RF/Microwave Filters

HP2816 Thin Film High Pass Filter


HP2816A1000SNTR 15W

TAPE & REEL

All tape and reel specifications are in compliance with EIA 481-1-A. (equivalent to IEC 286 part 3).

- 12mm carrier
- Reeled quantities: Reels of 2,000 per 7" reel

REEL DIMENSIONS: (MM)

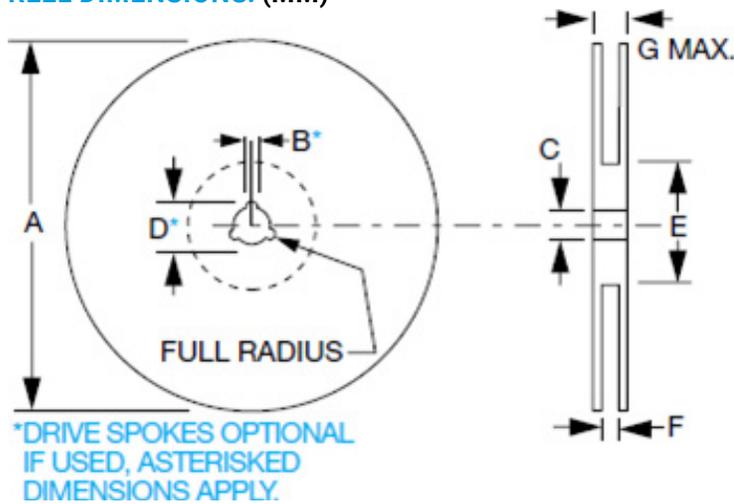

CARRIER

