


High Precision Bulk Metal[®] Foil Extended Value Range Resistor, with TCR of 2 ppm/°C, Tolerance to 0.005 %, and Power Rated at 0.6 W

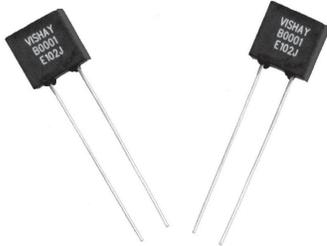

Any value available within resistance range

Bulk Metal[®] foil (BMF) technology outperforms all other resistor technologies available today for applications that require high precision and high stability.

This technology has been pioneered and developed by VISHAY, and products based on this technology are the most suitable for a wide range of applications.

BMF technology allows us to produce customer orientated products, designed to satisfy challenging and specific technical requirements.

The E102C (0.150" lead spacing) and E102J (0.200" lead spacing) extends the range of the high precision aerospace and instrumentation standard S102C/J from 150K to 300K.

Our application engineering department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

FEATURES

- Temperature coefficient of resistance (TCR):
- 55 °C to + 125 °C, + 25 °C ref.
2 ppm/°C typical
- Rated power: to 0.3 W at + 125 °C
- Tolerance: ± 0.005 %
- Load life stability: to ± 0.005 % at 70 °C, 2000 h at rated power
- Resistance range: 150 kΩ to 300 kΩ (higher and lower values of resistance are available)
- Electrostatic discharge (ESD) above 25 000 V
- Non inductive, non capacitive design
- Rise time: 1 ns without ringing
- Current noise: < - 40 dB
- Thermal EMF: 0.05 μV/°C typical
- Voltage coefficient < 0.1 ppm/V
- Low inductance: < 0.08 μH typical
- Non hot spot design
- Terminal finishes available: lead (Pb)-free
tin/lead alloy
- Matched sets are available on request
(TCR tracking: to 0.5 ppm/°C)
- For better TCR and PCR performances please review the E102Z datasheet

FIGURE 1 - TYPICAL TCR CURVE

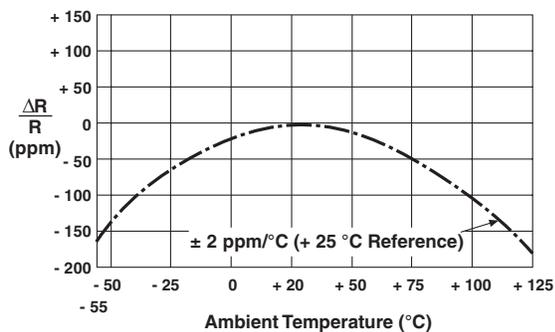


FIGURE 2 - POWER DERATING CURVE

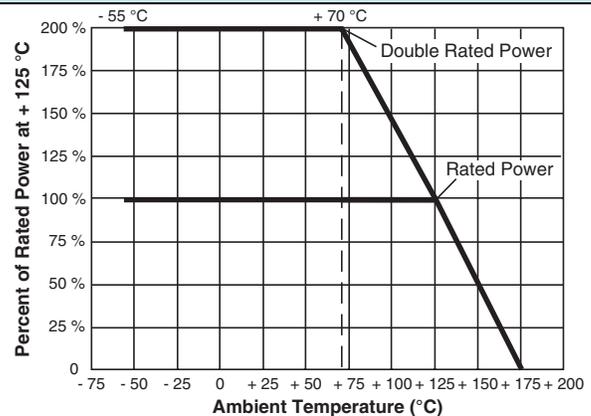


TABLE 1 - E102 SPECIFICATIONS

Stability Load life at 2000 h	± 0.005 % maximum ΔR at 0.1 W/+ 70 °C ± 0.015 % maximum ΔR at 0.3 W/+ 125 °C
Load life at 10 000 h	± 0.01 % maximum ΔR at 0.05 W/+ 125 °C ± 0.05 % maximum ΔR at 0.3 W/+ 125 °C
Current Noise	< - 40 dB
High Frequency Operation Rise time Inductance (L) Capacitance (C)	1.0 ns 0.1 μH maximum; 0.08 μH typical 1.0 pF maximum; 0.5 pF typical
Voltage Coefficient	< 0.1 ppm/V
Thermal EMF	0.1 μV/°C maximum; 0.05 μV/°C typical

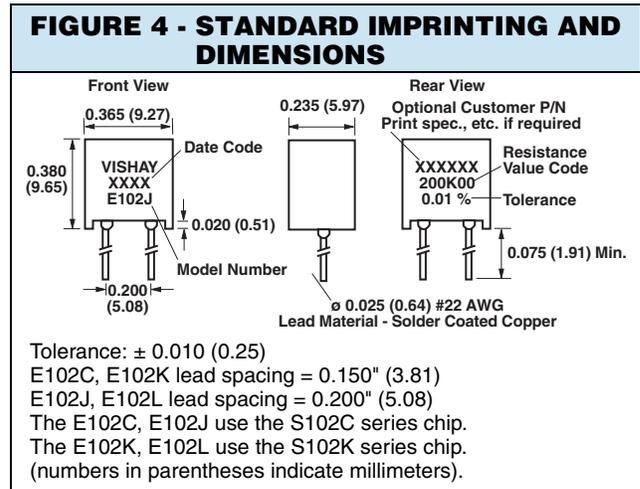
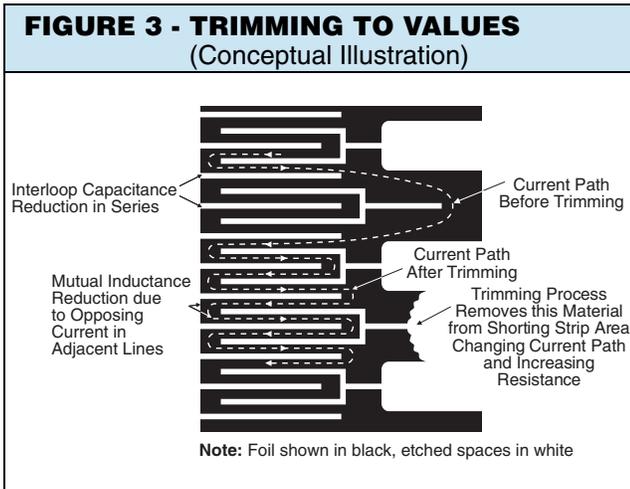


TABLE 2 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y1186150K000T9L (preferred part number format)

DENOTES PRECISION Y	VALUE K = k Ω	AER* 0 = standard part, tin/lead termination 9 = standard part, lead (Pb)-free termination 1 - 999 = custom
Y 1 1 8 6	1 5 0 K 0 0 0	T 9 L
PRODUCT CODE 1186 = E102C 1184 = E102J 1187 = E102K 1185 = E102L	RESISTANCE TOLERANCE V = ± 0.005 % T = ± 0.01 % Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1.0 %	PACKAGING L = bulk pack

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1186 150K000 T 9 L:
 TYPE: E102C
 VALUE: 150.0 k Ω
 ABSOLUTE TOLERANCE: ± 0.01 %
 TERMINATION: lead (Pb)-free
 PACKAGING: bulk pack

HISTORICAL PART NUMBER: E102C T 150K00 T B (will continue to be used)

E102C MODEL E102C E102J E102K E102L	T TERMINATION T = lead (Pb)-free None = tin/lead alloy	150K00 OHMIC VALUE 150K00 = 150.0 k Ω	T RESISTANCE TOLERANCE V = ± 0.005 % T = ± 0.01 % Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1.0 %	B PACKAGING B = bulk pack
---	--	---	--	--

Note

* Application engineering release: for non-standard requests, please contact application engineering.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.