

NT2016SA


Temperature Compensated Crystal Oscillator
with AFC function(VC-TCXO)

Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

Features

- Supports low power supply voltage.
(Supports DC +1.7V to +3.3V. Standard specification : +1.8V)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.8 mm, 0.0022 cm³, and 0.008 g, respectively.
- With an AFC (Automatic Frequency Control) function.
- Low power consumption.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

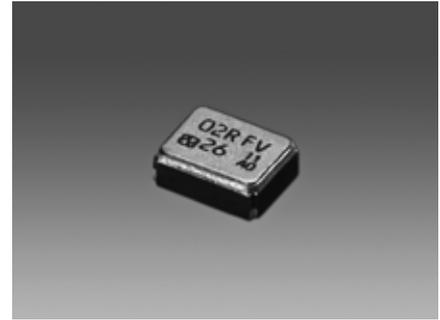

Pb Free

RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

Specifications


Item	Model	NT2016SA						
Nominal Frequency Range (MHz)		10 to 52						
Standard Frequency (MHz)		16.368	16.369	19.2	26	32	38.4	52
Supply Voltage [V _{cc}] (V)		+1.8						
Load Impedance		10 kΩ//10 pF						
Current Consumption (mA)		Max. 1.5			Max. 1.7		Max. 2.0	
Output Voltage		Min. 0.8 V(p-p) (DC Coupling *1)						
Frequency/Temperature Characteristics		Max. $\pm 2.0 \times 10^{-6}$						
Operating Temperature Range (°C)		-30 to +85						
Storage Temperature Range (°C)		-40 to +85						
Frequency/Voltage Coefficient		Max. $\pm 0.2 \times 10^{-6} / +1.8 \text{ V} \pm 5 \%$						
Frequency/Load Coefficient		Max. $\pm 0.2 \times 10^{-6} / (10 \text{ k}\Omega // 10 \text{ pF}) \pm 10 \%$						
Long-term Frequency Stability		Max. $\pm 1.0 \times 10^{-6} / \text{year}$						
Frequency Control Range		$\pm 7.0 \times 10^{-6}$ to $\pm 13.0 \times 10^{-6} / +0.9 \text{ V} \pm 0.8 \text{ V}$						
Specification Number		NSC5320A	NSC5320A	NSC5320A	NSC5320B	NSC5320C	NSC5320C	NSC5320D

* Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

* Products without the AFC (Automatic Frequency Control) function are available. If you require such a product, please contact us.

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

Dimensions

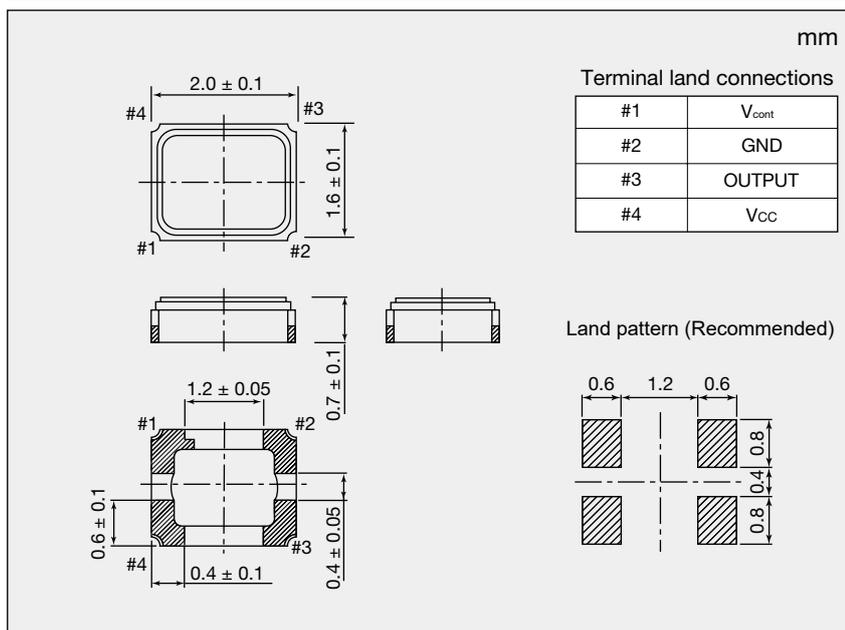

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.