

Description: ISM868/915MHz, 2.4GHz Antenna


PART NUMBER: W3332B0150

Series: Internal



Features:

- Tri-band dual feed ISM antenna
- PCB radiator with two pigtail coax feeds (815/915MHz and 2.4GHz)
- Size 15.5x82.5x0.5mm
- U.FL compatible connectors

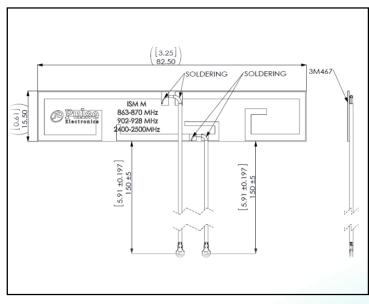

Applications:

- Devices using ISM band radios 868MHz, 915MHz, 2.4GHz
- · Machine to Machine, IoT
- Data terminals and routers using ISM bands
- 2.4-2.5GHz band also applicable for Bluetooth, BLE Zigbee. WiFi

All dimensions are in mm / inches

Issue: 1649

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 3611 NE 112th Ave Vancouver, WA 98682 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

ELECTRICAL SPECIFICATIONS

Cable 1		
Frequency	863-928	MHz
Nominal Impedance	50	Ω
Return loss(max)	-5	dB
Peak Gain	0.2	dBi
Average Efficiency	55	%
Cable 2		
Frequency	2400-2500	MHz
Nominal Impedance	50	Ω
Return loss(max)	-10	dB
Peak Gain	4.1	dBi
Average Efficiency	64	%
Isolation between cable 1 and cable 2		
@863-928MHz	-16	dB
@2400-2500MHz	-11	dB





Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

MECHANICAL SPECIFICATIONS

PCB material FR4

PCB thickness 0.5 mm

Adhesive 3M467

Cable type OD 1.13mm coax

Cable length 150 mm

Connector U.FL compatible

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40/+85 ° C




Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

MECHANICAL DRAWING

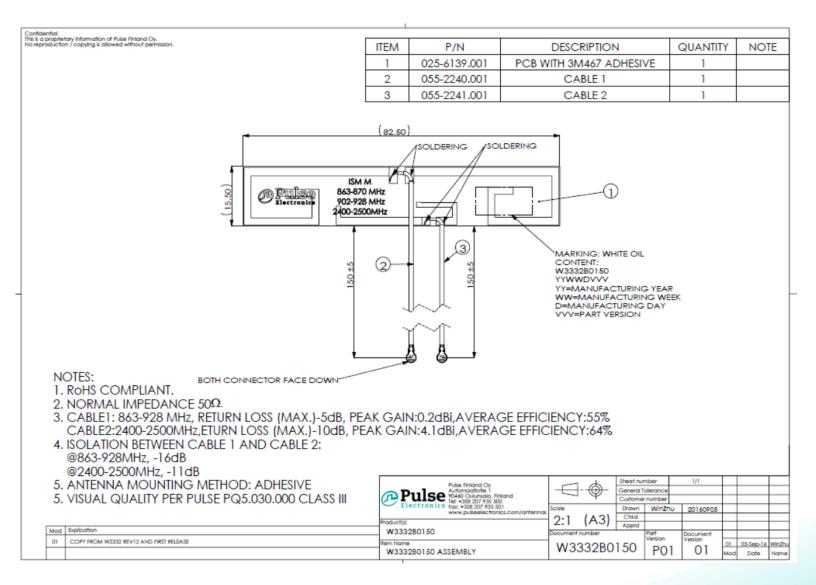






Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

Return loss

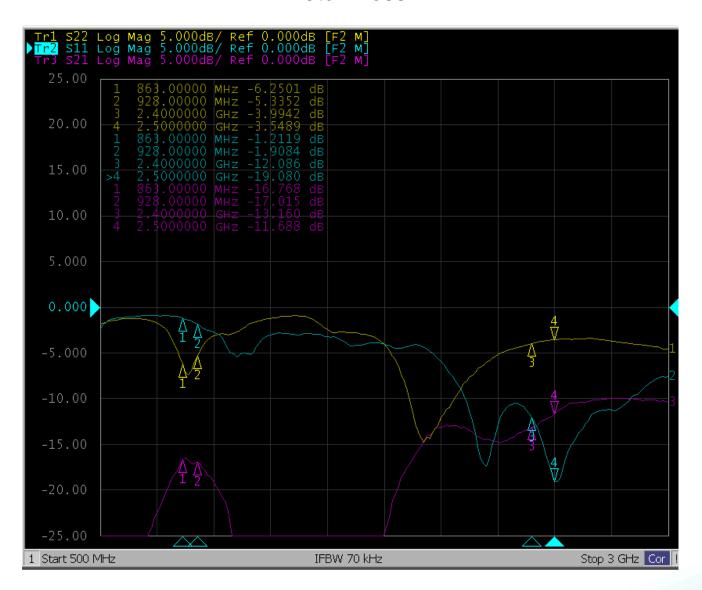





Description: ISM868/915MHz, 2.4GHz Antenna


Series: Internal

PART NUMBER: W3332B0150

CHARTS

Efficiency

Efficiency vs Frequency measured in free space W3332 measured in PSU

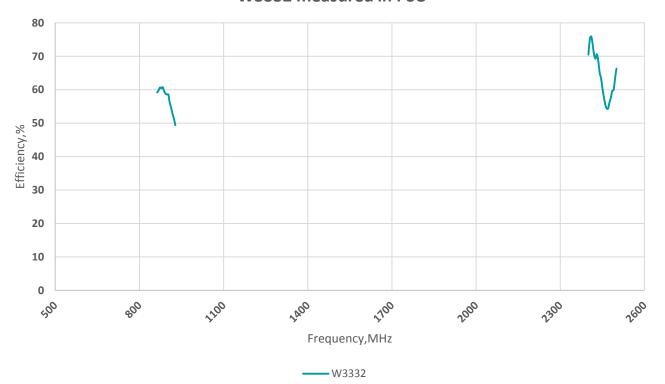





Description: ISM868/915MHz, 2.4GHz Antenna


Series: Internal

PART NUMBER: W3332B0150

CHARTS

Peak Gain

Peak Gain vs Frequency measured in free space W3332 measured in PSU

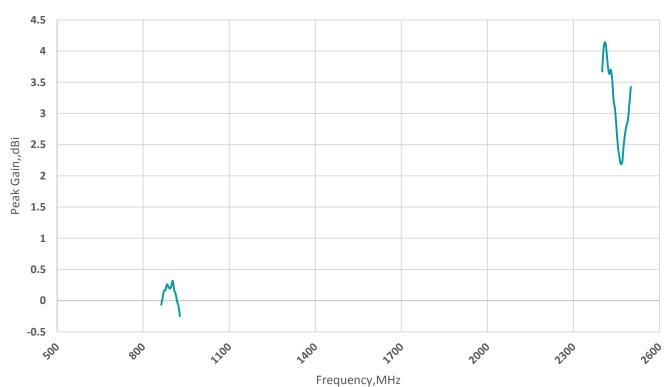




Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

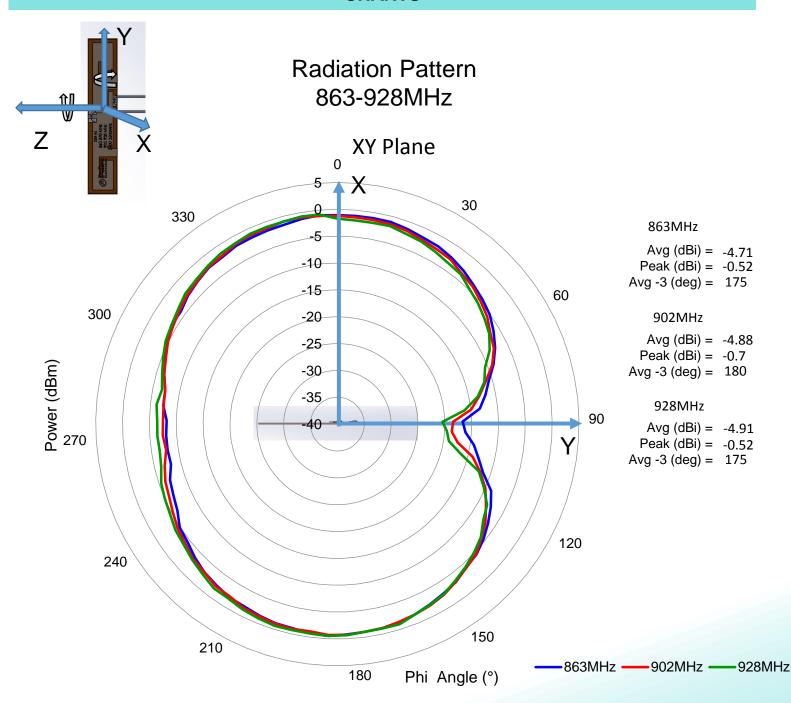






Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

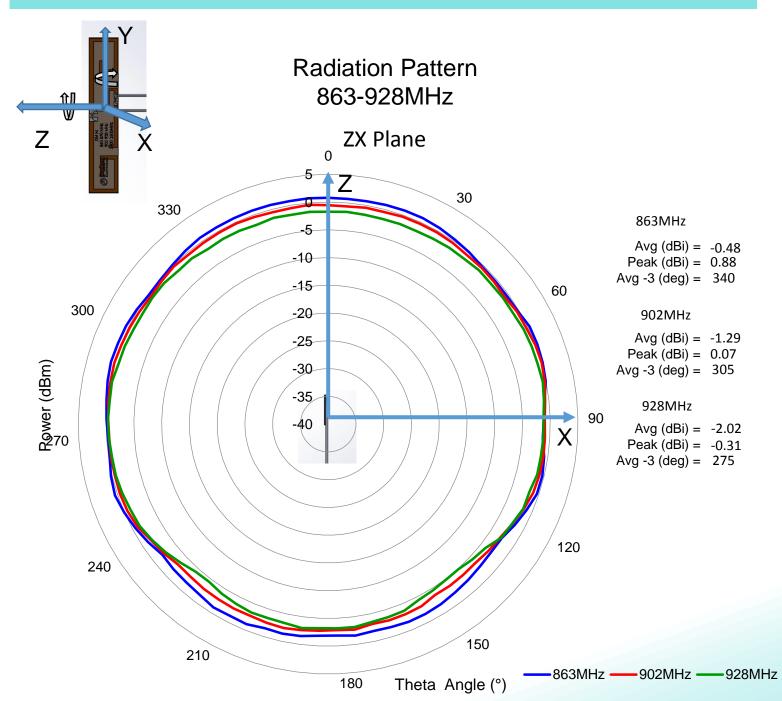






Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

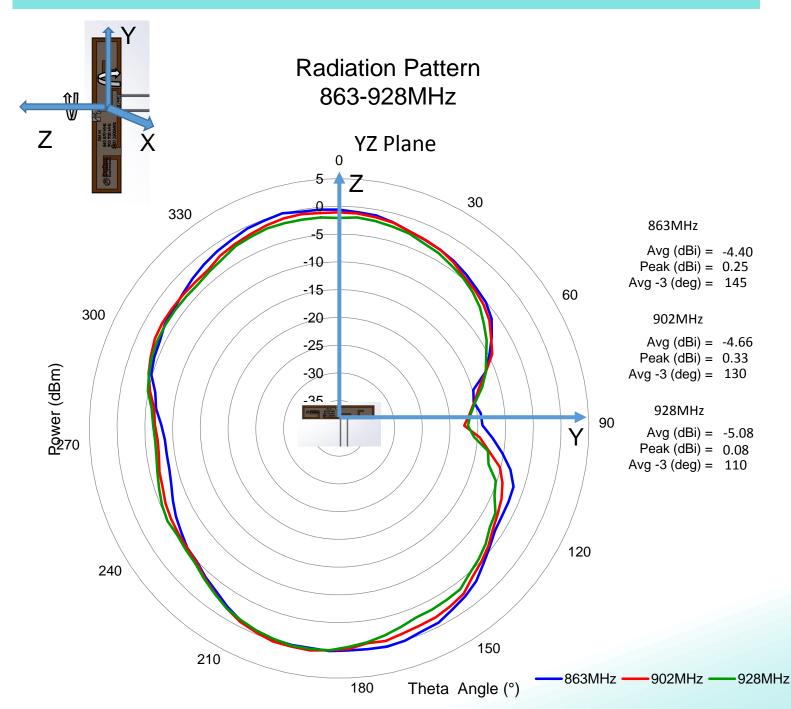





Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS Radiation Pattern 2400-2500MHz XY Plane 0 30 330 2400MHz Avg (dBi) = -1.91-10 Peak (dBi) = 2.27 Avg - 3 (deg) = 145-15 60 300 -20 2450MHz Avg (dBi) = -1.54-25 Peak (dBi) = 1.39 Rower (dBm) -30 Avg - 3 (deg) = 185-35 2500MHz 90 40 Avg (dBi) = -1.52Peak (dBi) = 1.06 Avg - 3 (deg) = 225120 240 150 210 2400MHz 2450MHz

Issue: 1649



2500MHz

Phi Angle (°)

180




Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

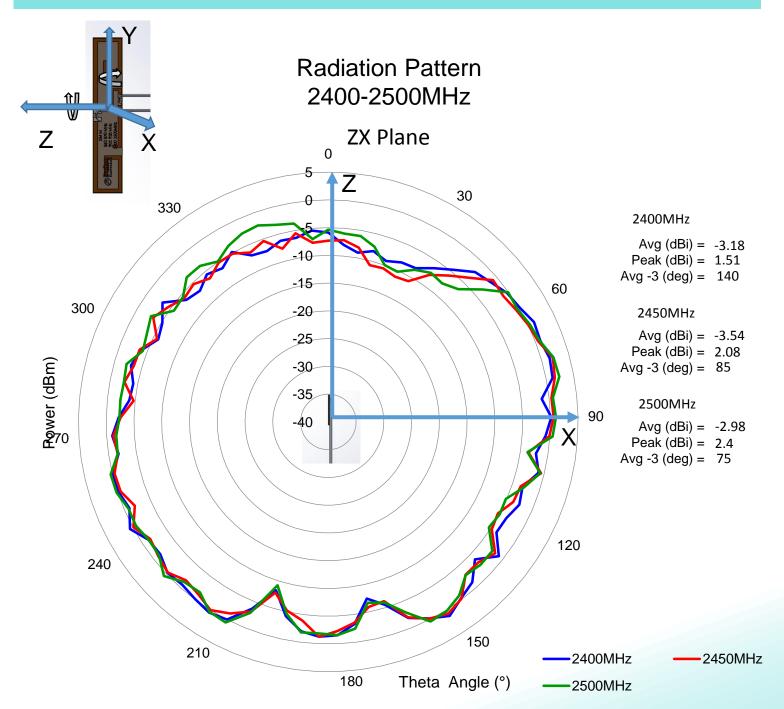






Description: ISM868/915MHz, 2.4GHz Antenna

Series: Internal

PART NUMBER: W3332B0150

CHARTS

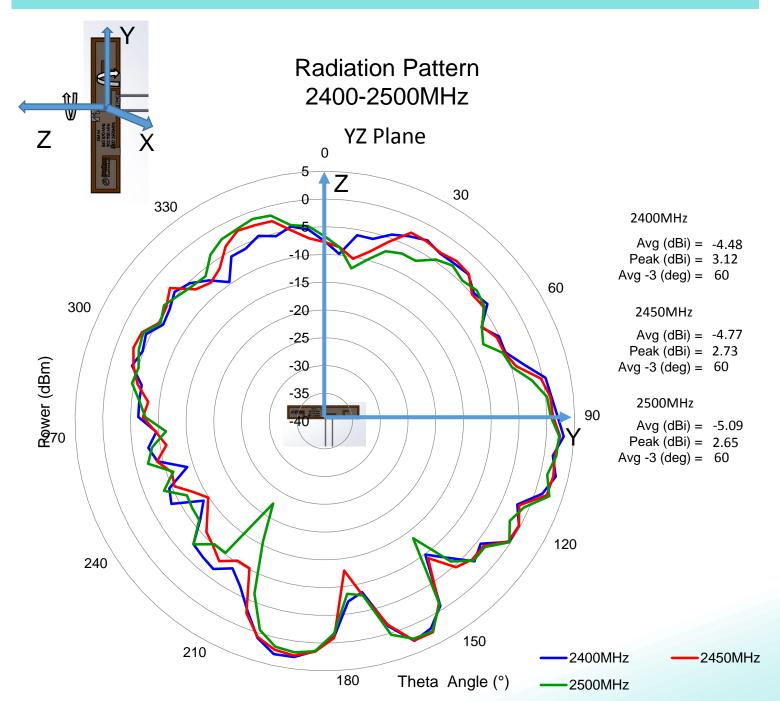





Description: ISM868/915MHz, 2.4GHz Antenna

PART NUMBER: W3332B0150

Series: Internal

PACKAGING

10PCS/PE bag 1000PCS/box



