I. MATERIALS AND FINISHES:

BODY - PHOSPHOR BRONZE, NICKEL PLATING (.0001" THICK) CONTACT - BRASS, GOLD PLATING (.00003" THICK) FERRULE - BRASS, NICKEL PLATING (.0001" THICK) INSULATOR - PTFE

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM

B. FREQUENCY RANGE: DC - 4 GHz C. VSWR(RETURN LOSS): 1.3 MAX.

D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.


3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: -65° C TO +165° C


4. FERRULE TO BE CRIMPED WITH A . 178 HEX DIE. CONTACT TO BE CRIMPED WITH A .042 SQUARE DIE OR A 8 PT CRIMPER AMPHENOL NUMBER 227-T1200


5 SHOWS CABLE ENTRY DIMENSIONS.

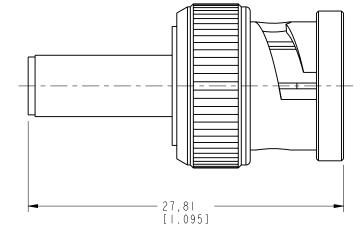


THIRD ANGLE PROJ. 🕀 🖯


AFTER ASSEMBLY DIMENSIONS

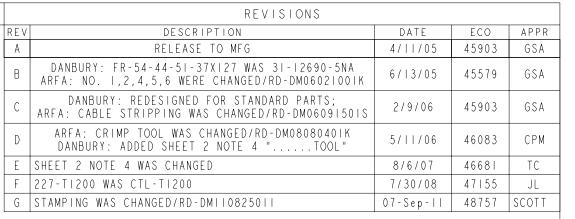


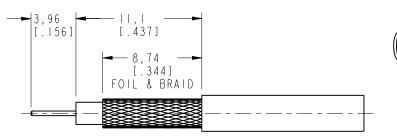




RECOMMENDED CABLE STRIPPING DIMENSIONS

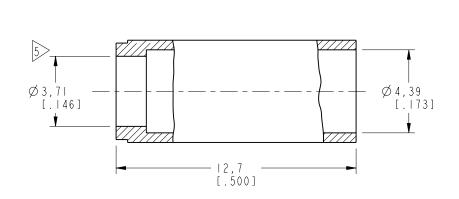

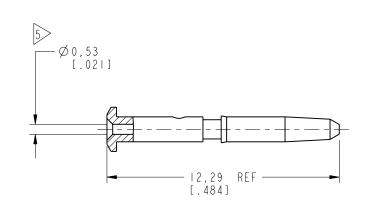

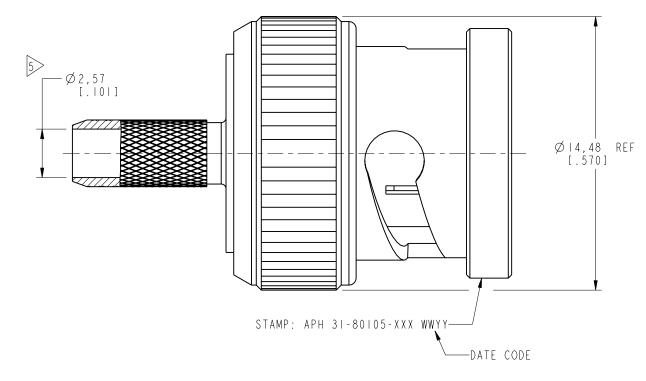

REV

G

75 OHM BNC PLUG FOR AT&T 735A CABLE

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

| \pm 0.05mm | \pm 0 . Imm | \pm 0.2mm | ± 0.3mm | ±1° |
|-----------------|--------------------|--------------------|-------------------|--------------------|
| NOTICE - These | drawings, specifi | ications, or other | data (I) are, and | d remain the |
| | | must be returned | | |
| | | losed to any perso | | |
| | | e funishing of the | | |
| | | to any other per | | |
| | | oin or otherwise i | | |
| | | | | e, use or sell any |
| product, proces | is or design, pate | ented or otherwsie | , that may in any | way be related to |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

6 - 30mm 30 - 120mm ANGLES

0.5 - 6mm

or disclosed by said drawings, specifications, or other data.

| | MATERIAL | DRAWN I.XU | DATE 26 - Aug - II | TITLE | PLUG A CAI | |
|-------------------------------|--------------------------|-------------------------|-----------------------|-------------------|---------------|------|
| | SEE NOTE | ENGINEER G. ANTONINI | DATE 03-Mar-05 | 75 OHM FOR AT& | | |
| | REFERENCE AND CLI 2006 | APPROVED | DATE | | | |
| EAR# 1674 CONFIGURATION LEVEL | | S. HSIEH | 05-Sep-II | SCALE: 5.0:1.0 | SHEET 2 | OF 2 |
| | CONFIGURATION LEVEL: *** | CAD FILE | | DWG SIZĖ | | RE |
| | FINISH | | | В | | G |

| | Amphenol RF | |
|---------|---|------|
| Danbury | CT USA, Tainan, Taiwan, Shenzhen, C www.amphenolrf.com | hina |

| DRAWI | NG | NO. | 3 -80 05 |
|-------|-----|-------|--------------|
| ITEM | NO. | 31- | 80105 |
| PART | NO. | . 31- | 80 05 |