

**Electrical Testing** per Tusonix standard test plans and Mil-Std-202 Test Methods.

## MARKETING SALES DRAWING







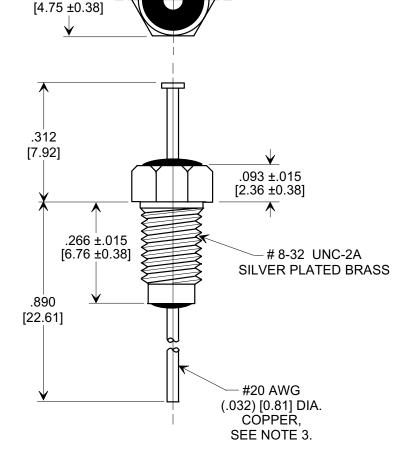

## NOTES:

- 1. SUPPLIED WITH SILVER PLATED HEX NUT AND LOCKWASHER.
- 2. TUSONIX STANDARD PART NUMBER: 4201-051. TUSONIX RoHS COMPLIANT PART NUMBER: 4201-051 LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- 3. LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: SILVER PLATED.
- 4. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

.187 ±.015

(-2015 Rev-0	Original Release C.O. 1653	CURREN E. 08-20	2595	RDN TO METRIC	19990	ADDED S.M. 07-	20050					<b>DUNIA</b> ON, ARIZONA		4	201-05	1	
15 Rev-0		l⊢∹	۱اخ	COMP FMT & C. S.M. 03-05-9	05-3-01	NOTES, IR & -28-05	50726				SONIX	Appro	Approved H.R. 03-08-98				
2	elease	l⊢	,				-2-26				ANGLE	ES ± /-//-	✓ Draw	n S.M. 03-0	08-98	Scale <sub>4 X</sub>	
0000	<u> </u>	"A" A					9				DECIM	DECIMAL ±.031[0.79]					
9	0	ADDED.	-	ADDED	2	DWV.	3				TOLERANCES Unless Otherwise Specified			Title BUSHING STYLE EMI FILTER			
			5500		2	00		100	10 A	10 G	400	14	55	70	70		
			5500		85	85°C 125°		25 °C	10.4	10 G	400	MHz	MHz	GHz	GHz GHz	_	
			(pF)			(WVdc)			(ldc)	100 (VDC.)	(VDC)	10	100	1	10	1	
			MIN. CAP.			WORKING VOLTAGE			CURRENT	MIN.(02)	DWV (VDC)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220					