



Rating:
3 to 15A, 125, 250VAC, 50VDC


Approvals:
UL, CUL, VDE, CE

Interrupting capacity:
1000 amps

Insulation Resistance:
100M ohms

Applications:
Household Appliances
Transportation
Marine
Power Strips
Medical Equipment
Audio Visual Equipment
Power Supplies
Exercise Equipment
ROHS Compliant


Ordering Scheme

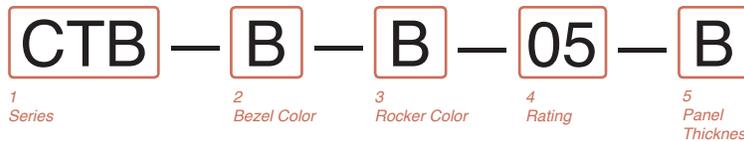

<p>1 SERIES CTB</p>	<p>4 RATING</p> <table border="0"> <tr> <td>03 3 amp</td> <td>08 8 amp</td> <td>14 14 amp</td> </tr> <tr> <td>04 4 amp</td> <td>09 9 amp</td> <td>15 15 amp</td> </tr> <tr> <td>05 5 amp</td> <td>10 10 amp</td> <td></td> </tr> <tr> <td>06 6 amp</td> <td>12 12 amp</td> <td></td> </tr> <tr> <td>07 7 amp</td> <td>13 13 amp</td> <td></td> </tr> </table>	03 3 amp	08 8 amp	14 14 amp	04 4 amp	09 9 amp	15 15 amp	05 5 amp	10 10 amp		06 6 amp	12 12 amp		07 7 amp	13 13 amp	
03 3 amp	08 8 amp	14 14 amp														
04 4 amp	09 9 amp	15 15 amp														
05 5 amp	10 10 amp															
06 6 amp	12 12 amp															
07 7 amp	13 13 amp															
<p>2 BEZEL COLOR¹ B Black</p>	<p>5 PANEL THICKNESS blank fits standard thickness of .032 - .062 B fits .070 - .110 panel thickness</p>															
<p>3 ROCKER COLOR¹ B Black</p>																

Notes:
1 Additional colors available. Consult factory.


Time Delay

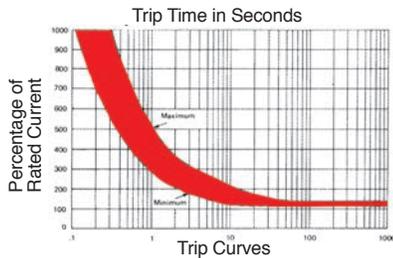

CORRECTION FACTOR ¹	
0°C	x .67
10°C	x .72
15°C	x .83
18°C	x .87
25°C	x 1.00
32°C	x 1.05
40°C	x 1.18
50°C	x 1.33
60°C	x 1.67

Notes:
1 To adjust the breaker rating for ambient temperature, multiply the breaker rating by the factor. (ex: 5A rating x .850 = 4.25A. Select 4A rating.)

Dimensional Specifications: in. [mm]

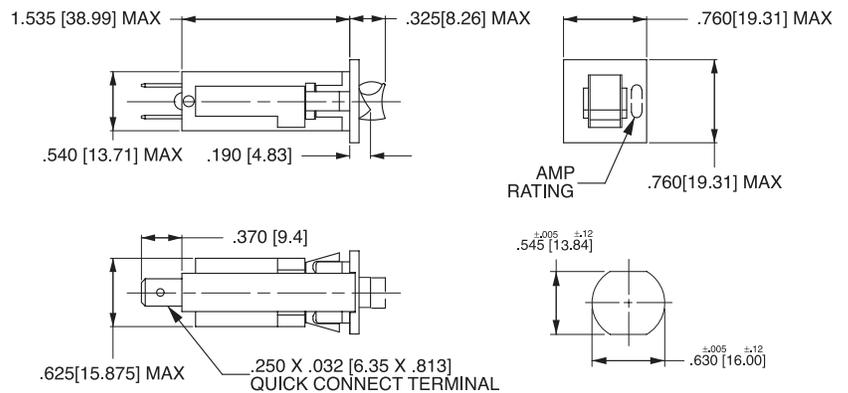

RECOMMENDED PANEL THICKNESS:
.032 - .062 [.81-1.57]

Notes:
All dimensions are in inches [millimeters]. Tolerance ± 0.005 [.127] unless otherwise specified. Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.

*Manufacturer reserves the right to change product specification without prior notice.