




### Flanged Resistors 400 Watts

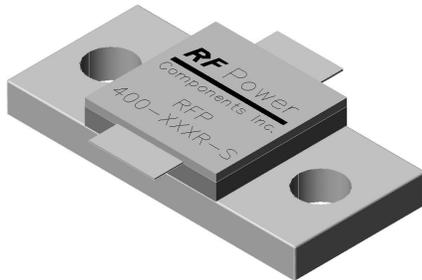

#### General Specifications

<b>Resistive Element</b>	Thick film
<b>Substrate</b>	Beryllium oxide ceramic
<b>Cover</b>	Alumina ceramic
<b>Mounting flange</b>	Copper, nickel plated per QQ-N-290
<b>Leads</b>	99% pure silver (.005" thick)

#### Features:

- DC – 500 MHz
- 400 Watts
- BeO Ceramic
- Non-Nichrome Resistive Element
- Welded Silver Leads
- 100% Tested
- RoHS


#### Electrical Specifications

<b>Resistance Range:</b>	See Chart
<b>Frequency Range;</b>	DC – 0.50 GHz
<b>Power:</b>	400 Watts
<b>Capacitance:</b>	See Chart

Tolerance is  $\pm 0.010$ ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. Operating temperature is -55°C to 155°C (see chart for derating temperatures).

**All dimensions in inches.**  
**Specifications subject to change with out notice.**

#### Outline Drawing

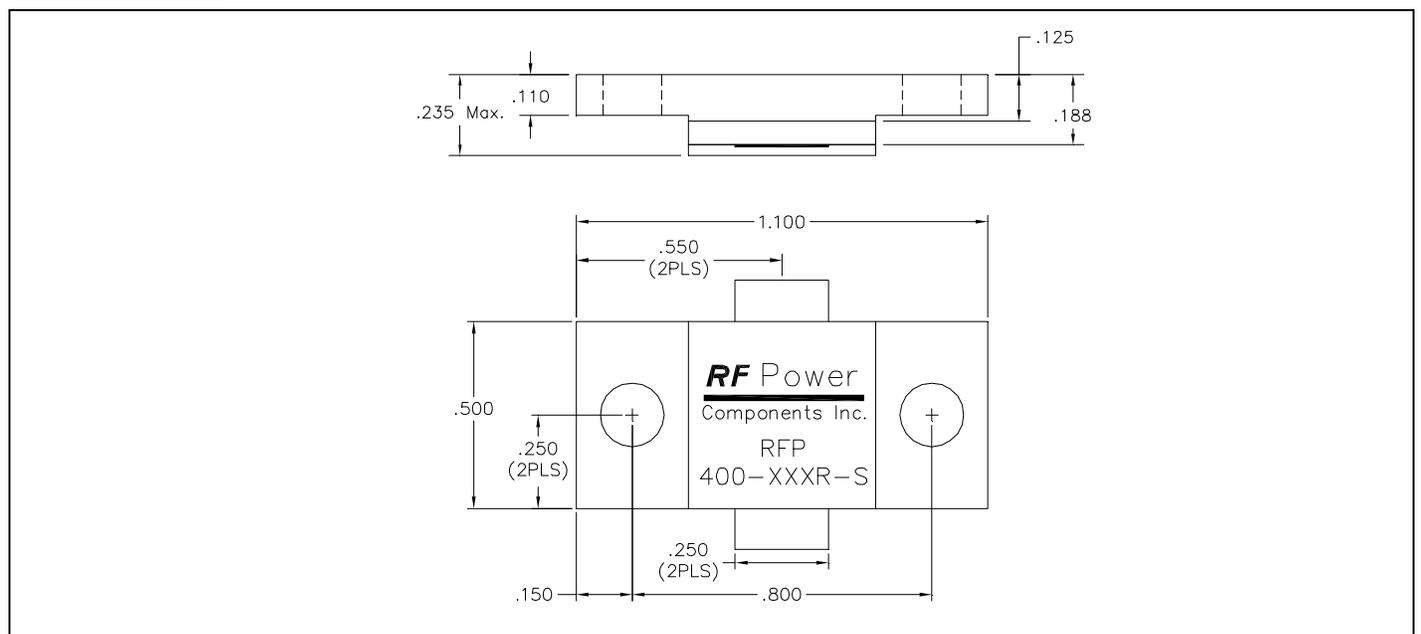

400-XXXR-S (097) Rev C



# Model RFP-400-XXXR-S

# Anaren



## Specifications:



PART NUMBER	FREQUENCY RANGE	VALUE	CAPACITANCE	TOLERANCE
RFP-400-39R-S	DC - 0.5 GHz	39 $\Omega$	9.0 pF	$\pm 5\%$
RFP-400-50R-S	DC - 0.5 GHz	50 $\Omega$	9.0 pF	$\pm 5\%$
RFP-400-100R-S	DC - 0.5 GHz	100 $\Omega$	9.0 pF	$\pm 5\%$

## Power De-rating:

## Mounting Footprint and Procedure:

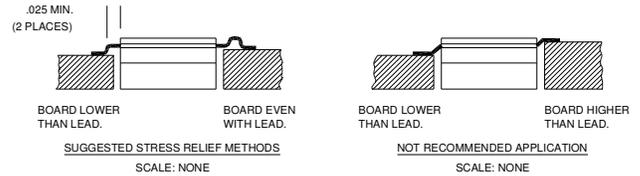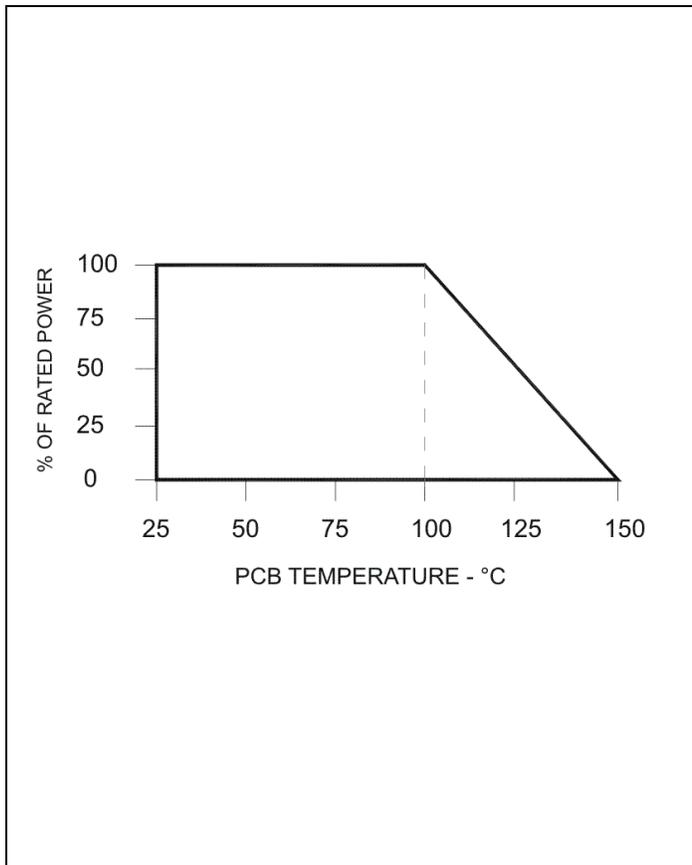

### SUGGESTED MOUNTING PROCEDURES:

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES (.001" UNDER THE DEVICE) TO OPTIMIZE THE HEAT TRANSFER.
2. DRILL & TAP THE HEATSINK FOR THE APPROPRIATE THREAD SIZE TO BE USED.
3. COAT HEATSINK WITH A MINIMUM AMOUNT OF HIGH QUALITY SILICONE GREASE (.001" MAX. THICKNESS).
4. POSITION DEVICE ON MOUNTING SURFACE & SECURE USING SOCKET HEAD SCREWS, FLAT & SPLIT WASHER. TORQUE SCREWS TO THE APPROPRIATE VALUE. MAKE SURE THAT THE DEVICE IS FLAT AGAINST THE HEATSINK. (CARE SHOULD BE TAKEN TO AVOID UPWARD PRESSURE OF THE LEADS TOWARDS THE LID).
5. SOLDER LEADS IN PLACE USING APPROPRIATE SOLDER WITH A CONTROLLED TEMPERATURE IRON.

\*\* FOR MORE DETAILS CONTACT FACTORY \*\*

400-XXXR-S (097) Rev C

USA/Canada: (315) 432-8909  
Toll Free: (800) 544-2414  
Europe: +44 2392-232392

Available on Tape and  
Reel For Pick and Place  
Manufacturing.



**Anaren**  
What'll we think of next?™