# ENHANCED DIFFERENTIAL RECEIVER

Precision Edge<sup>®</sup> SY89250V


#### **FEATURES**

- 3.3V and 5V power supply options
- 250ps propagation delay
- Very high voltage gain
- Ideal for Pulse Amplifier and Limiting Amplifier applications
- Data synchronous Enable/Disable (/EN) on Q<sub>HG</sub> and /Q<sub>HG</sub> provides for complete glitchless gating of the outputs
- Ideal for gating timing signals
- Complete solution for high quality, high frequency crystal oscillator applications
- Available in an ultra-small 8-pin (2mm × 2mm) MLF™ package

#### **APPLICATIONS**

■ Oscillator modules

#### **BLOCK DIAGRAM**





Precision Edge®

## **DESCRIPTION**

The SY89250V is a differential PECL/ECL receiver/buffer in a space saving (2mm  $\times$  2mm) MLFTM package. The device is functionally equivalent to the SY100EL16VC, but features a 70% smaller footprint. It provides a  $\rm V_{BB}$  output for either single-ended application or as a DC bias for AC-coupling to the device.

The SY89250V provides an /EN input which is synchronized with the data input (D) signal in a way that provides glitchless gating of the Q<sub>HG</sub> and /Q<sub>HG</sub> outputs. When the /EN signal is LOW, the input is passed to the outputs and the data output equals the data input. When the data input is HIGH and the /EN goes HIGH, it will force the QHG LOW and the /QHG HIGH on the next negative transition of the data input. If the data input is LOW when the /EN goes HIGH, the next data transition to a HIGH is ignored and QHG remains LOW and /Q<sub>HG</sub> remains HIGH. The next positive transition of the data input is not passed on to the data outputs under these conditions. The Q<sub>HG</sub> and /Q<sub>HG</sub> outputs remain in their disabled state as long as the /EN input is held HIGH. The /EN input has no influence on the /Q output and the data input is passed on (inverted) to this output whether /EN is HIGH or LOW. This configuration is ideal for crystal oscillator applications, where the oscillator can be free running and gated on and off synchronously without adding extra counts to the output.


All support documentation can be found on Micrel's web site at www.micrel.com.

## **FUNCTIONAL CROSS REFERENCE**

| Micrel Part Number | PECL/ECL | Functional Cross |
|--------------------|----------|------------------|
| SY89250V           | 100k     | SY100EL16VC      |

Precision Edge is a registered trademark of Micrel, Inc. MicroLeadFrame and MLF are trademarks of Amkor Technology, Inc.

## **PACKAGE/ORDERING INFORMATION**



8-Pin MLF™ (Ultra-Small Outline)

## Ordering Information<sup>(1)</sup>

| Part Number                 | Package<br>Type | Operating<br>Range | Package<br>Marking                     | Lead<br>Finish    |
|-----------------------------|-----------------|--------------------|--|-------------------|
| SY89250VMI                  | MLF-8           | Industrial         | 250                                    | Sn-Pb             |
| SY89250VMITR <sup>(2)</sup> | MLF-8           | Industrial         | 250                                    | Sn-Pb             |
| SY89250VMG                  | MLF-8           | Industrial         | 250 with<br>Pb-Free bar-line indicator | Pb-Free<br>NiPdAu |
| SY89250VMGTR <sup>(2)</sup> | MLF-8           | Industrial         | 250 with<br>Pb-Free bar-line indicator | Pb-Free<br>NiPdAu |

#### Notes:

- 1. Contact factory for die availability. Dice are guaranteed at  $T_A = 25$ °C, DC electricals only.
- 2. Tape and Reel.

## **PIN DESCRIPTION**

| Pin Number | Pin Name            | Туре                        | Pin Function  |  |
|------------|---------------------|-----------------------------|---|--|
| 1          | /Q                  | 100k                        | Single-Ended PECL/ECL Feedback Output.  |  |
| 2          | D                   | 100k                        | Single-Ended PECL/ECL Input: The signal input includes an internal $75k\Omega$ pull-down ECL Input resistor. If input is left open, Q output will default to LOW. See "Input Interface Applications" section for single-ended inputs. |  |
| 3          | VBB                 | Reference<br>Output Voltage | Bias Voltage: $V_{CC}$ -1.3V. Used as reference voltage when AC-coupling to the D input. Max sink/source is $\pm 0.5$ mA.   |  |
| 4          | /EN                 | Enable Input                | /EN Input which is synchronized with data input (D) signal in a way that provides glitchless gating of $Q_{HG}$ and $/Q_{HG}$ outputs. Includes internal $75k\Omega$ pull-down resistor. Default is LOW                               |  |
| 5          | VEE,<br>Exposed Pad | Negative<br>Power Supply    | Negative Power Supply: V <sub>EE</sub> and exposed pad must be tied to most negative supply. For PECL/LVPECL connect to ground.   |  |
| 6, 7       | /QHG, QHG           | 100k<br>ECL Output          | Differential PECL/ECL Output: Defaults to LOW if D inputs left open. See "Output Interface Applications" section for recommendations on terminations.   |  |
| 8          | VCC                 | Positive<br>Power Supply    | Positive Power Supply: Bypass with 0.1μF//0.01μF low ESR capacitors.  |  |

## **TRUTH TABLE**

| /EN | Q <sub>HG</sub> Output |  |  |
|-----|------------------------|--|--|
| 0   | Data                   |  |  |
| 1   | Logic Low              |  |  |

## **Absolute Maximum Ratings**(1)

## Operating Ratings<sup>(2)</sup>

| Power Supply Voltage  V <sub>CC</sub> -V <sub>EE</sub> | . 3.3V $\pm 10\%$ or 5V $\pm 10\%$ |
|--|------------------------------------|
| Ambient Temperature (T <sub>A</sub> )                  | 40°C to +85°C                      |
| Package Thermal Resistance, (3)                        |                                    |
| MLF™ (θ <sub>JA</sub> )<br>Still-Air                   |                                    |
| Still-Air  | 93°C/W                             |
| $MLF^{\scriptscriptstyle\mathsf{TM}}\ (\psi_{JB}),$    | 60°C/W                             |

## DC ELECTRICAL CHARACTERISTICS

 $T_A = -40^{\circ}C$  to +85°C; unless otherwise stated.

| Symbol          | Parameter                | Condition   | Min                   | Тур                   | Max                   | Units  |
|-----------------|--------------------------|---|-----------------------|-----------------------|-----------------------|--------|
| V <sub>EE</sub> | Power Supply             | V <sub>CC</sub> -V <sub>EE</sub>  <br> V <sub>CC</sub> -V <sub>EE</sub> | 3.0<br>4.5            | 3.3<br>5.0            | 3.6<br>5.5            | V<br>V |
| I <sub>EE</sub> | Power Supply Current     |   |                       |                       | 46                    | mA     |
| I <sub>IH</sub> | Input HIGH Current       |   |                       |                       | 150                   | μΑ     |
| $V_{BB}$        | Output Reference Voltage |   | V <sub>CC</sub> -1.38 | V <sub>CC</sub> -1.32 | V <sub>CC</sub> -1.26 | V      |

## DC ELECTRICAL CHARACTERISTICS

 $V_{CC}$  = +3.3V ±10% or +5V ±10% and  $V_{EE}$  = 0V;  $V_{CC}$  = 0V and  $V_{EE}$  = -3.3V ±10% or -5V ±10%;  $T_A$  = -40°C to +85°C; unless otherwise stated.

| Symbol          | Parameter                | Condition | Min                    | Тур | Max                    | Units |
|-----------------|--------------------------|-----------|------------------------|-----|------------------------|-------|
| V <sub>OH</sub> | Output HIGH Voltage      | Note 4    | V <sub>CC</sub> -1.085 |     | V <sub>CC</sub> -0.880 | V     |
| V <sub>OL</sub> | Output LOW Voltage       | Note 4    | V <sub>CC</sub> -1.830 |     | V <sub>CC</sub> -1.555 | V     |
| $V_{IH}$        | Input HIGH Voltage       |           | V <sub>CC</sub> -1.165 |     | V <sub>CC</sub> -0.880 | V     |
| V <sub>IL</sub> | Input LOW Voltage        |           | V <sub>CC</sub> -1.810 |     | V <sub>CC</sub> –1.475 | V     |
| $V_{BB}$        | Output Reference Voltage |           | V <sub>CC</sub> -1.38  |     | V <sub>CC</sub> -1.26  | V     |
| $V_{PP}$        | Minimum Input Swing      |           | 150                    |     |                        | mV    |
| I <sub>IH</sub> | Input HIGH Current       |           |                        |     | 150                    | μΑ    |
| I <sub>IL</sub> | Input LOW Current        |           | 0.5                    |     |                        | μΑ    |

#### Notes:

- Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to ABSOLUTE MAXIMUM RATING conditions for extended periods may affect device reliability.
- 2. The data sheet limits are not guaranteed if the device is operated beyond the operating ratings.
- 3. Package thermal resistance assumes exposed pad is soldered (or equivalent) to the devices most negative potential on the PCB.
- 4. Output loaded with 50  $\!\Omega$  to V  $_{CC}$  –2  $\!V.$

## **AC ELECTRICAL CHARACTERISTICS**


 $V_{EE} = V_{EE}(min)$  to  $V_{EE}(max)$ ;  $V_{CC} = GND$ ;  $T_A = -40^{\circ}C$  to +85°C; unless otherwise stated.

| Symbol                          | Parameter   |                                 | Condition            | Min  | Тур | Max                      | Units                |
|---------------------------------|---|---------------------------------|----------------------|------|-----|--------------------------|----------------------|
| t <sub>pd</sub>                 | Propagation Delay to:<br>Q, /Q Output<br>QHG, /QHG Output | D (Diff) D (SE) D (Diff) D (SE) |                      |      |     | 380<br>430<br>730<br>780 | ps<br>ps<br>ps<br>ps |
| $t_S$                           | Set-Up Time   | /EN                             |                      |      | 150 |                          | ps                   |
| t <sub>H</sub>                  | Hold Time   | /EN                             |                      |      | 150 |                          | ps                   |
| t <sub>SKEW</sub>               | Duty Cycle Skew   | (Diff)                          | Note 5               |      | 5   | 20                       | ps                   |
| $V_{PP}$                        | Minimum Input Swing                                       | /EN                             | Note 6               | 150  |     |                          | mV                   |
| $V_{CMR}$                       | Common Mode Range   | /EN                             | Note 7               | -1.3 |     | -0.4                     | V                    |
| t <sub>r</sub> , t <sub>f</sub> | Output Q Rise/Fall Times (20% to 80%)                     |                                 | At full output swing | 100  | 225 | 350                      | ps                   |

#### Notes:

- 5. Duty cycle skew is the difference between a  $t_{\rm pd}$  propagation delay through a device.
- 6. Minimum input swing for which AC parameters are guaranteed. The device has a DC gain of  $\approx$  40 to Q, /Q outputs and a DC gain of  $\approx$  200 or higher to /Q<sub>HG</sub>, Q<sub>HG</sub> outputs.
- 7. The CMR range is referenced to the most positive side of the differential input signal. Normal operation is obtained if the HIGH level falls within the specified range and the peak-to-peak voltage lies between  $V_{PP}(min)$  and 1V. The lower end of the CMR range varies 1:1 with  $V_{EE}$ . The numbers in the spec table assume a nominal  $V_{EE} = -3.3$ V. Note for PECL operation, the  $V_{CMR}(min)$  will be fixed at 3.3V  $-|V_{CMR}(min)|$ .

#### TIMING DIAGRAM

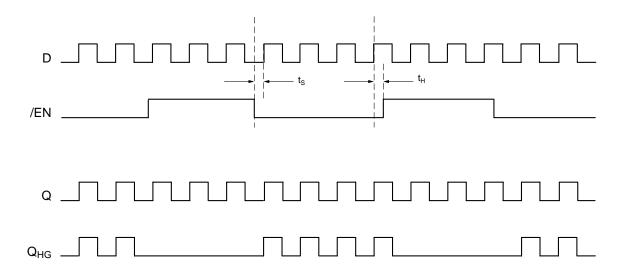

## **OUTPUT INTERFACE APPLICATIONS**

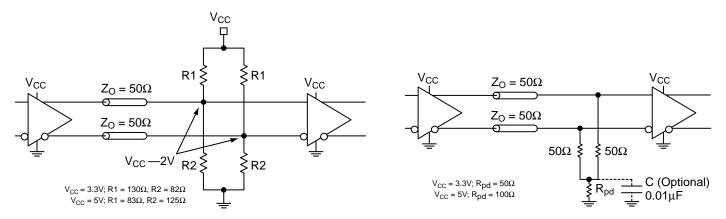


Figure 1a. Parallel Thevenin-Equivalent Termination

Figure 1b. Three Resistor "Y Termination"


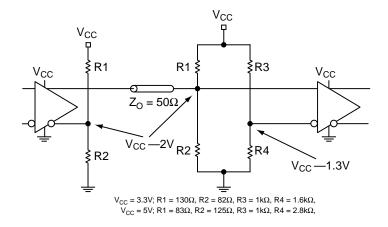


Figure 1c. Terminating Unused I/O

## RELATED PRODUCT AND SUPPORT DOCUMENTATION

| Part Number   | Function  | Data Sheet Link   |
|---------------|---|---|
| SY89306/316V  | 3.3V/5V 2.5GHz PECL/ECL<br>Differential Receiver/Buffer | www.micrel.com/product-info/products/sy89306-316v.shtml |
| SY89206/216V  | 3.3V/5V 1GHz PECL/ECL<br>Differential Receiver/Buffer   | www.micrel.com/product-info/products/sy89206-216v.shtml |
| HBW Solutions | New Products and Applications                           | www.micrel.com/product-info/products/solutions.shtml    |

## 8 LEAD ULTRA-SMALL EPAD-*Micro*LeadFrame™ (MLF-8)

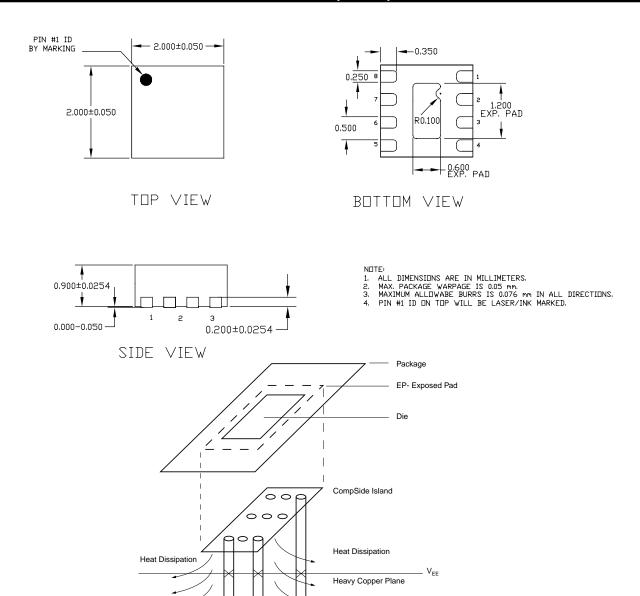

PCB Thermal Consideration for 8-Pin MLF™ Package

Heavy Copper Plane

#### Package Notes:

- 1. Package meets Level 2 qualification.
- 2. All parts are dry-packaged before shipment.
- 3. Exposed pads must be soldered to a ground for proper thermal management.

#### MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use.

Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.