SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

LL RECOGNIZED: LL 1283 CSA CERTIFIED: CSA C22.2, # 8
VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 10 AMP, 120/250 VAC, 10 AMP/40°C, 250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.25 mA@ 120V 60Hz 0.40 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS: I = I = $\sqrt{85-10}$

 $I_0 = I_r$

85 - Ta

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDZ

CUSTOMER DRAWING CATALOG # 10CUFE1 ECN # APPRVD.

TEST SPECIFICATIONS:

INDLCTANCE: 0.31 mH NDMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0028 μF ±20% LINE TO LINE: 0.1000 µF ±20% DISCHARGE RESISTOR: 3.3 M △

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH


RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

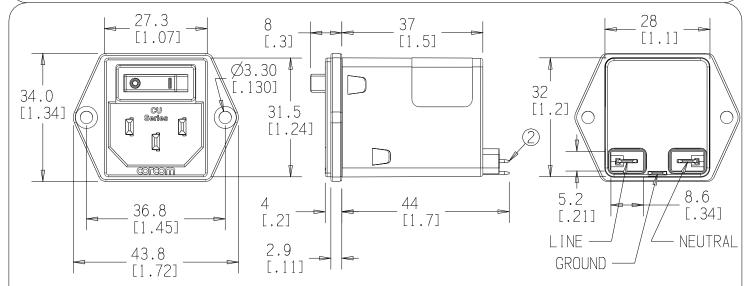




NOTES:

1. SOCKET COMPLIES WITH EN 60320-1.

(2). LOAD TERMINALS COMPLY WITH DIN 46244. 4.8MM X 0.8MM.



	50 a - 50 a (MINIMUM) INSERTION LOSS													CS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES
FREGUENCY MHz	.05	.15	.5	1	5	10	30	/	/	/	/	/	UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE ±0.5 MM MATERIAL & FINISH: AS SUPPLIED	Tyco Electronics
COMMON dB	1	7	19	25	35	36	52	/	/	/	/	/	DIMENSIONS ARE:	POWER LINE FILTER
DIFF. dB	1	10	20	23	29	34	56	/	/	/	/	/	MILLIMETER (INCH)	TYCO ELECTRONICS PART NO. 2-1609113-5
ZHET SIZE	/ / () MRITIEN AUTHORIZATION FROM TICO ELECTRONICS CORPORATION.												CVM	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$