

Socket for PCBs; angled; 3-pole; Cod. B; light green

www.wago.com/890-863/011-000



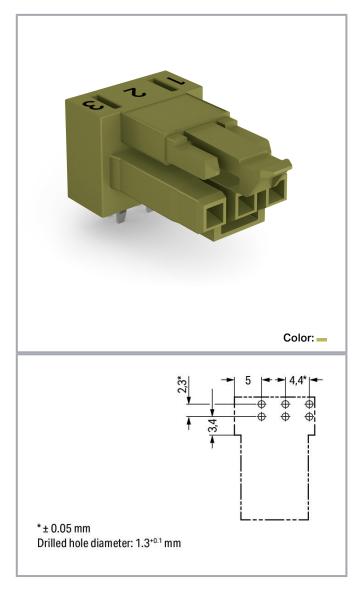

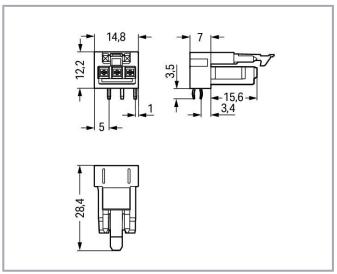

# Item description

# Female connector/socket WINSTA® MINI 3-pole

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/890-863/011-000



WAGO offers various connection technology solutions for connecting devices, for example, the *WINSTA*® MINI female connector/socket. The pluggable PCB connectors with spring pressure connection technology and Push-in CAGE CLAMP® technology from WAGO allow fast, vibration-proof, maintenance-free terminal connections. The mechanical coding and color coding of the pcb connector ensure error-free installation of the individual components – including protection against mismating. Solutions like the *WINSTA*® MINI pcb connectors with B coding are appropriate for applications involving process control, such as for lighting or in data networks. Due to its particularly minimal dimensions, our *WINSTA*® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is specifically suitable in very tight spaces, i.e., for installations when very little room is available.

## WINSTA® MINI solutions for your electrical installation - protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus faster, more reliable, and error-free. Using this pre-assembled system decreases assembly times and installation errors at the construction site. Now you can also cut installation costs without compromising quality and safety: The WINSTA® MINI pcb connector with marking eliminates the need for servicing and prevents unnecessary downtime.

- pcb connector with protection against mismating
- easy tool-free operation, a wide range of coding options
- for automation controllers
- convenient installation and commissioning

# Data Notes

Variants:	Other pole markings
	Other versions (or variants) can be requested from WAGO Sales or
	configured at https://configurator.wago.com/.

## **Electrical data**

## Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	250 V
Rated impulse voltage (III/3)	4 kV
Rated current	16 A
Note (rated current)	13 A for 3-pole load
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/890-863/011-000



# Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 5 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	14 A

### General

Note on contact resistance app	pprox. 1 m $\Omega$ of contact resistance
арр	pprox. 0.25 mΩ contact transition plug/socket

## Connection data

Total number of potentials	3
Number of levels	1

## **Connection 1**

Pole number	3	

# Physical data

Pin spacing	4.4 mm / 0.173 inches
Width	14.8 mm / 0.583 inches
Height	15.7 mm / 0.618 inches
Height from the surface	12.2 mm / 0.48 inches
Depth	28.4 mm / 1.118 inches
Solder pin length	3.5 mm
Solder pin dimensions	1 x 0.8 mm
Drilled hole diameter with tolerance	1.3 <sup>(±0.1)</sup> mm

## **Mechanical Data**

Application	Control technology
Coding	В
Variable coding	No
Marking	123
Potential marking	123

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/890-863/011-000

WAGO GmbH & Co. KG

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

Hansastr. 27

32423 Minden



Contact type (pluggable connector)  Connector (connection type)  Mismating protection  Note on mismating protection  All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole  Mating direction to the PCB  Docking lever  Locking elver  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers a only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2 with first and the solder pins/pole  Information on material specifications can be found here  Color  Bight green	ting force of a plug-in connection approx. 20 70 N (depending on pole number)		
Design angled  Design angled  Connection  Contact type (pluggable connector) Female connector/socket  Connector (connection type) for PCB  Mismating protection  All WINSTA* components are 100% protected against mismating when: a) plugging different numbers of poles b) plugging while laterally staggered d) plugging op pole  Mating direction to the PCB  Cocking lever  Locking of plug-in connection  Note on locking system  All Connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  Information on material specifications can be found here  Color light green  Information on material specifications can be found here  Subject to changes. Please also observe the further product documentation!	Retention force of a plug-in connection	Locked: > 80 N	
Design angled  Plug-in connection  Contact type (pluggable connector) Female connector/socket  Connector (connection type) for PCB  Mismating protection Yes  Mismating protection Yes  Mismating protection Yes  Mismating protection All WINSTA* components are 100% protected against mismating when:  a) plugging different numbers of poles b) plugging while rotated 180 c) plugging yes  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers to only required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2 in-line solder pins/pole  Material Data  Note (material data)  Information on material specifications can be found here  Color  Bight green	Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)	
Design angled  Plug-in connection  Contact type (pluggable connector) Female connector/socket  Connector (connection type) for PCB  Mismating protection Yes  Note on mismating protection  All W/NSTA* components are 100% protected against mismating wher: a) plugging different numbers of poles b) plugging while rotated 180 c) plugging while laterally staggered d) plugging one pole  Mating direction to the PCB  0°  Locking lever  Locking lever  Locking lever  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers sonly required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  Note (material data)  Information on material specifications can be found here  Color  lighting fixtures on material specifications can be found here  Color  lighting fixtures on material specifications can be found here  Information on material specifications can be found here	Number of mating cycles	200, without resistive load	
Connector (connection type)  Connector (connection type)  Mismating protection  Note on mismating protection  Mating direction the PCB  Locking lever  Locking lever  Locking system  Mote on locking system  All Connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers only required for ffying leads (plug/socket).  PCB contact  PCB contact  PCB contact  PCB contact  Note (material data)  Note (material Data  Note (material Data  Subject to changes. Please also observe the further product documentation!		100, with resistive load $I_N = 16 \text{ A}$ , tested (1.5 mm <sup>2</sup> )	
Contact type (pluggable connector)  Connector (connection type)  Mismating protection  Note on mismating protection  All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole  Mating direction to the PCB  Docking lever  Locking elver  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers a only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2 with first and the solder pins/pole  Information on material specifications can be found here  Color  Bight green	Design	angled	
Connector (connection type)  Mismating protection  Note on mismating protection  Note on mismating protection  Mating direction to the PCB  Locking lever  Locking lever  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  Locking of plug-in connection  Note on locking system  Mating direction to the PCB  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers to only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2  Material Data  Note (material data)  Information on material specifications can be found here  Color  Bight green	Plug-in connection		
Mismating protection  Note on mismating protection  Note on mismating protection  All WWNSTA* components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole  Mating direction to the PCB  O*  Locking lever  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2 in-line solder pins/pole  Material Data  Note (material data)  Information on material specifications can be found here  Color  Bight green	Contact type (pluggable connector)	Female connector/socket	
Note on mismating protection  All WINSTA* components are 100% protected against mismating when: a. I plugging different numbers of poles b. I plugging while rotated 180 c. I plugging while laterally staggered d. I plugging one pole  Mating direction to the PCB  O°  Locking lever  Locking lever  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are servely locked. Additional locking levers only required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2  Material Data  Note (material data)  Information on material specifications can be found here  Color  Ilight green	Connector (connection type)	for PCB	
When: a) plugging different numbers of poles b) plugging while rotated 180 c) plugging while laterally staggered d) plugging one pole  Mating direction to the PCB  O°  Locking lever  Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers to only required for flying leads (plug/socket).  PCB contact  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Material Data  Note (material data)  Information on material specifications can be found here  Color  light green	Mismating protection	Yes	
Locking lever Locking of plug-in connection Note on locking system Note on locking system Note on locking system Note on locking system All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers to only required for flying leads (plug/socket).  PCB contact PCB contact THT Solder pin arrangement 2 in-line solder pins/pole Number of solder pins per potential 2  Material Data Note (material data) Information on material specifications can be found here Color light green Subject to changes. Please also observe the further product documentation!	Note on mismating protection	<ul><li>a.) plugging different numbers of poles</li><li>b.) plugging while rotated 180</li><li>c.) plugging while laterally staggered</li></ul>	
Locking of plug-in connection  Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers to only required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  Number of solder pins per potential  2 in-line solder pins/pole  Number of solder pins per potential  Information on material specifications can be found here  Color  light green	Mating direction to the PCB	0 °	
Note on locking system  All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers only required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2  Material Data  Note (material data)  Information on material specifications can be found here  Subject to changes. Please also observe the further product documentation!	Locking lever	yes	
lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers a only required for flying leads (plug/socket).  PCB contact  PCB contact  THT  Solder pin arrangement  2 in-line solder pins/pole  Number of solder pins per potential  2  Material Data  Note (material data)  Information on material specifications can be found here  Color  light green  Subject to changes. Please also observe the further product documentation!	Locking of plug-in connection	locking lever	
PCB contact THT Solder pin arrangement 2 in-line solder pins/pole Number of solder pins per potential 2  Material Data Note (material data) Information on material specifications can be found here Subject to changes. Please also observe the further product documentation!	Note on locking system	lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are	
Solder pin arrangement  Number of solder pins per potential  2  Material Data  Note (material data)  Color  Information on material specifications can be found here  Bubject to changes. Please also observe the further product documentation!	PCB contact		
Number of solder pins per potential 2  Material Data  Note (material data)  Color   light green  Subject to changes. Please also observe the further product documentation!	PCB contact	ТНТ	
Material Data  Note (material data)  Information on material specifications can be found here  Color   light green  Subject to changes. Please also observe the further product documentation!	Solder pin arrangement	2 in-line solder pins/pole	
Note (material data)  Information on material specifications can be found here  Color  Iight green  Subject to changes. Please also observe the further product documentation!	Number of solder pins per potential	2	
Color light green  Subject to changes. Please also observe the further product documentation!	Material Data		
Subject to changes. Please also observe the further product documentation!	Note (material data)	Information on material specifications can be found here	
	Color	light green	
	Subject to changes, Please also observe the further produce	ct documentation!	
	MACO Combilla Co. KC		

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

05.06.2023 Page 4/8

www.wago.com/890-863/011-000



Cover color	gray
Material group	1
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.016 MJ
Weight	3.4 g

# **Environmental requirements**

Processing temperature	-5 +40 ℃
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 8.0	EC002560
ETIM 7.0	EC002560
PU (SPU)	100 pcs
Packaging type	box
Country of origin	PL
GTIN	4050821696032
Customs tariff number	85366990990

# **Environmental Product Compliance**

RoHS Compliance Status	Compliant,No Exemption

# Approvals / Certificates

#### General approvals

			Certificate
Logo	Approval	Additional Approval Text	name
	СВ	EN 61984	71-112993
I/EMA	DEKRA Certification B V		



Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/890-863/011-000



	CB DEKRA Certification B.V.	IEC 61984		NL-64351
c <b>91</b> 0°us	cURus Underwriters Laboratories Inc.	UL 1977		E45171
KEMA	KEMA/KEUR DEKRA Certification B.V.	EN 60320		2148952.04
Declarations of	of conformity and manufacturer's declarations			0 115
Logo	Approval	Additional Approval Text		Certificate name
ĊE	EU-Declaration of Conformity WAGO GmbH & Co. KG	-		-
UK CA	UK-Declaration of Conformity WAGO GmbH & Co. KG	-		-
Approvals for	marine applications			
Logo	Approval	Additional Approval Text		Certificate name
THE DIVIDINAL PROPERTY OF THE	DNV GL Det Norske Veritas, Germanischer Lloyd	-		TAE00001Z6
DO LQ THE AMERICAN NAME OF THE AMERICAN	LR Lloyds Register	EN 61535		08/20047 (E2)
Counterpar	t			
	Item no.890-273 Plug; 3-pole; Cod. B; 1,50 mm²; light green		www.wago.com/890-273	
-30	Item no.891-8993/005-105 pre-assembled interconnecting cable; Socket/plug; 3-pole; Cod. B; 1 m; 1,00 mm²; light green		www.wago.com/891-8993/005- 105	
	Item no.891-8993/205-105		www.wago.com/89	1-8993/205-

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/890-863/011-000



pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. B; 1 m; 1,00 mm²; light green

105

# Downloads CAD/CAE-Data

CAD data

2D/3D Models 890-863/011-000 URL Download

**PCB** Design

Symbol and Footprint 890-863/011-000 URL Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

### Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

05.06.2023 Page 7/8

www.wago.com/890-863/011-000



**CAE** data

ZUKEN Portal 890-863/011-000 URL Download

**Environmental Product Compliance** 

Compliance Search

Environmental Product Compliance 890-863/011-000

Socket for PCBs; angled; 3-pole; Cod. B; light green

URL

Download

**Installation Notes** 

**Product family** 

WINSTA® MINI

Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.