

# Cascadable Amplifier 1000 to 4000 MHz

Rev. V3

#### **Features**

- WIDE BANDWIDTH
- HIGH GAIN 17.5 dB (TYP.)
- LOW NOISE: 4.1 dB (TYP.)
- GaAs FET DESIGN

#### **Description**

The A45-1 RF amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.

This single stage GaAs FET feedback amplifier design displays impressive performance characteristics over a broadband frequency range. An RF choke is used for DC power supply decoupling.

Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

#### **Ordering Information**


Part Number	Package	
A45-1	TO-8	
SMA45-1	Surface Mount	
CA45-1 **	SMA Connectorized	

<sup>\*\*</sup> The connectorized version is not RoHs compliant.

# Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +5 V_{DC}$

Parameter	Units	Typical	Guaranteed	
		25°C	0° to 50°C	-54° to +85°C*
Frequency	MHz	80-4200	1000-4000	1000-4000
Small Signal Gain (min)	dB	17.5	16.5	15.5
Gain Flatness (max)	dB	±0.6	±0.8	±1.0
Reverse Isolation	dB	36		
Noise Figure (max)	dB	4.0	5.0	5.5
Power Output @ 1 dB comp. (min)	dBm	13.0	12.5	12.0
IP3	dBm	+26		
IP2	dBm	+33		
Second Order Harmonic IP	dBm	+40		
VSWR Input / Output (max)		1.8:1 / 1.8:1	1.9:1 / 1.9:1	2.0:1 / 2.0:1
DC Current @ 5 Volts (max)	mA	65	75	80

#### **Product Image**



## **Absolute Maximum Ratings**

Parameter	Absolute Maximum	
Storage Temperature	-62°C to +125°C	
Case Temperature	125°C	
DC Voltage	+6 V	
Continuous Input Power	+13 dBm	
Short Term Input power (1 minute max.)	100 mW	
Peak Power (3 µsec max.)	0.25 W	
"S" Series Burn-In Temperature (case)	125°C	

#### Thermal Data: $V_{CC} = +5 V_{DC}$

Parameter	Rating	
Thermal Resistance $\theta_{jc}$	132°C/W	
Transistor Power Dissipation P <sub>d</sub>	0.171 W	
Junction Temperature Rise Above Case T <sub>jc</sub>	23°C	

<sup>1 \*</sup> Over temperature performance limits for part number CA45-1, guaranteed from 0°C to +50°C only.




Cascadable Amplifier 1000 to 4000 MHz

Rev. V3


### Typical Performance Curves at +25°C

# Gain 20 19 1500 2500 3000 3500 FREQUENCY - MHz Noise Figure NOISE FIGURE-48 FREQUENCY - MHz Power Output\* OWER OUTPUT-48m 4000 FREQUENCY -- MHz \*at 1 dB Gain Compression Intercept Point 2ND ORDER TWO TONE ORDER TWO TONE 3000 EREQUENCY - MHz VSWR £ 2.0 1500 2000 2500 3000 FREQUENCY - MHz


# Outline Drawing: TO-8 \*

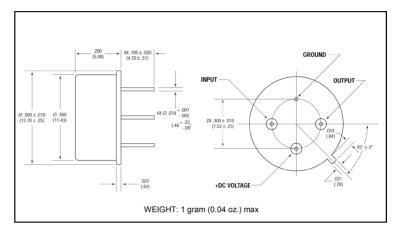

## Outline Drawing: Surface Mount

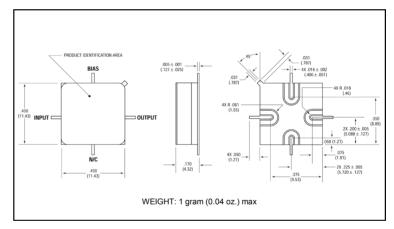

# Outline Drawing: SMA Connectorized \*

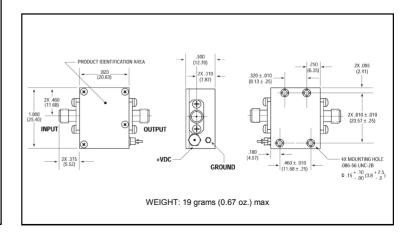

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

# A45-1 / SMA45-1



Cascadable Amplifier 1000 to 4000 MHz

Rev. V3

#### M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.