

# **Product Specifications**

Customer	Standard
Description	2.87" 3-Colors TFT EPD Panel
Model Name	E2287ES051
Date	2016/08/019
Doc. No.	1P112-00
Revision	01

	Customer Approval							
	Da	ite						
The	above	signature	represents	that	the	product	specifications,	testing

regulation, and warranty in the specifications are accepted

Tel: +886-6-279-5399

Rev.: 01

Design Engineering				
Approval	Check	Design		
蘇 2016.08.20 倉民	<u>蘇</u> 2016.08.20 <b>倉民</b>	林 2016.08.19 睦順		

4F, No. 28, Chuangye Rd., Tainan Science Park, Tainan City 74144, Taiwan (R.O.C.)

Fax: +886-6-505-5300

Date: 2016/08/19

Page: 1 of 31



Doc. No.1P112-00

### Copyright

Pervasive Displays Incorporated All rights reserved.

This document is the exclusive property of Pervasive Displays Inc. (PDI) and shall not be reproduced or copied or transformed to any other format without prior permission of PDI. (PDI Confidential)

本資料為龍亭新技股份有限公司專有之財產,非經許可,不得複製、翻印或轉變成其他形式使用。

龍亭新技股份有限公司 Pervasive Displays Inc.

4F, No. 28, Chuangye Rd., Tainan Science Park, Tainan City 74144, Taiwan (R.O.C.)

Tel: +886-6-279-5399

http://www.pervasivedisplays.com

Rev.: 01 Page: 2 of 31 Date: 2016/08/19





### **Table of Contents**

Re	vision I	History	6
Glo	ssary (	of Acronyms	7
1	Gener	al Description	8
	1.1	Overview	8
	1.2	Features	8
	1.3	Applications	8
	1.4	General Specifications	9
	1.5	Mechanical Specifications	.10
2	Absolu	ute Maximum Ratings	.12
	2.1	Absolute Ratings of Environment	.12
	2.2	Reliability Test Item	.13
	2.3	Product Warranty	.13
3	Electr	ical Characteristics	.14
	3.1	Absolute Maximum Ratings of Panel	.14
	3.2	Recommended Operation Conditions of Panel	.14
4	Applic	ation Circuit Block Diagram	.17
	4.1	Application Circuit Block Diagram	.17
5	Termi	nal Pin Assignment	.18
	5.1	Input Terminal Pin Assignment	.18
	5.2	Reference Circuit	.20
	5.3	Glass Breakage Detection	.21
6	Optica	al Characteristics	.22
	6.1	Measurement Conditions	.22
	6.2	Optical Specification	.22
	6.2.	1 Optical	.22
	6.2.2	2 Ghosting	.25
7	Packir	ng	.26
8	Preca	utions	.28
9	Defini	tion of Labels	.30





### **List of Figures**

Figure 1-1	EPD Drawing	11
Figure 3-1	Test Pattern of Panel	15
Figure 3-2	Image Update Current Profile	15
Figure 3-3	Current Measurement	15
Figure 5-1	EPD Reference Circuit	20
Figure 6-1	Optical Measurement	23
Figure 6-2	Definition of Viewing Angle to Measure Contrast Ratio	24
Figure 7-1	Packing Diagram	26
Figure 9-1	Model Labels	30
Figure 9-2	Definition of Model Labels	30
Figure 9-3	Carton Label	31
Figure 9-4	Pallet Label	31





#### **List of Tables**

Table 1-1	General Specification	ç
Table 1-2	Mechanical Specification	10
Table 1-3	Input Connector Specification	10
Table 2-1	Absolute Ratings of Environment	12
Table 2-2	Reliability Test Items	13
Table 3-1	Absolute Maximum Ratings of Panel	14
Table 3-2	DC Characteristics of Panel	14
Table 5-1	Terminal Pin Assignment	18
Table 6-1	Optical Measurement Conditions	22
Table 6-2	Optical Measurement with D65 Light Source	22
Table 6-3	Measurement of Ghosting	25



# **Revision History**

Version	Date	Page (New)	Section	Description
Ver.01	2016/08/19	All	All	First issued.

Rev.: 01 Page: 6 of 31 Date: 2016/08/19



EKVASIVE DISPLAYS

Doc. No.1P112-00

### **Glossary of Acronyms**

EPD Electrophoretic Display (e-Paper Display)

EPD Panel EPD

TCon Timing Controller

TFT Thin Film Transistor

FPC Flexible Printed Circuit
FPL Front Plane Laminate

SPI Serial Peripheral Interface

COG Chip on Glass

IIS Incoming Inspection Standard

ISTA International Safe Transit Association

PDI Pervasive Displays Incorporated

Rev.: 01 Page: 7 of 31 Date: 2016/08/19



Doc. No.1P112-00

### 1 General Description

#### 1.1 Overview

This is a 3-Colors 2.87" a-Si, active matrix TFT, Electronic Paper Display (EPD) panel. The panel is capable to show Black, White, and Red. It supports breakage detection. The panel has high resolution (112dpi) that it is able to easily display fine patterns. Due to its bi-stable nature, the EPD panel requires very little power to update and needs no power to maintain an image.

#### 1.2 Features

- a-Si TFT active matrix Electronic Paper Display(EPD)
- 3-colors support: White, Black, Red
- Breakage Detection
- Resolution: 296 x 128
- Ultra low power consumption
- Super Wide Viewing Angle near 180°
- Extra thin & light
- SPI interface
- RoHS compliant

#### 1.3 Applications

- Electronic shelf label (ESL)
- Reusable container
- Badge

Rev.: 01 Page: 8 of 31 Date: 2016/08/19





### 1.4 General Specifications

**Table 1-1 General Specification** 

Item	Specification	Unit	Note
Outline Dimension	79.0(H) x 36.7(V) x 1.0(T)	mm	(1)
Active Area	66.90(H) x 29.06(V)	mm	
Driver Element	a-Si TFT active matrix	-	
FPL	Spectra	-	
Pixel Number	296 x 128	pixel	
Pixel Pitch	0.23 x 0.23 (112dpi)	mm	
Pixel Arrangement	Vertical stripe	-	
Display Colors	Black/White/Red	-	
Surface Treatment	Anti-Glare	-	

Note (1): Not including FPC and Masking Film.

Rev.: 01 Page: 9 of 31 Date: 2016/08/19





### 1.5 Mechanical Specifications

Table 1-2 Mechanical Specification

Item		Min.	Тур.	Max.	Unit	Note
	Horizontal(H)	78.7	79.0	79.3	mm	
Glass Size	Vertical(V)	36.4	36.7	37.0	mm	
	Thickness(T)	0.9	1.0	1.1	mm	(1)
Weight		-	5.4	6.5	g	

Note (1): Not including the Masking Film.

Table 1-3 Input Connector Specification


Item	Pin numbers	Pitch (mm)	Connector	Note
Golden Finger	26	0.5	HRS FH34SRJ 34S or STARCONN 6700S34 or Compatible	

Note (1): HRS FH34SRJ 34S and STARCONN 6700S34 are 34-pins connectors. The middle 26 pins are used to connect FPC pads of EPD. The other 8 pins are used as dummy pins. Please refer PDI demo kit for detailed connection.

Rev.: 01 Page: 10 of 31 Date: 2016/08/19



Figure 1-1 EPD Drawing

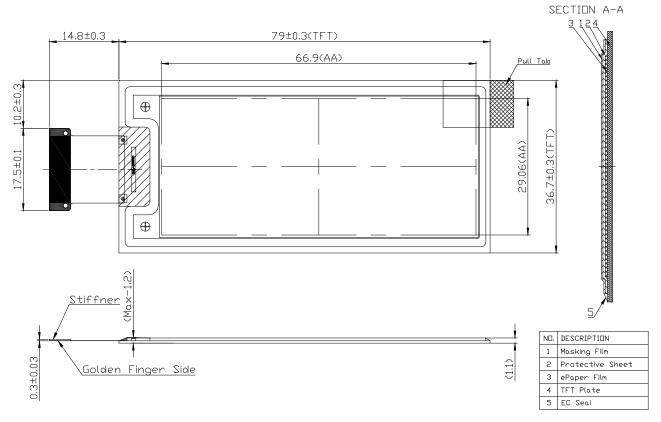

General tolerance: ±0.3mm

Rev.: 01 Page: 11 of 31 Date: 2016/08/19



### 2 Absolute Maximum Ratings

### 2.1 Absolute Ratings of Environment

Table 2-1 Absolute Ratings of Environment

Itoma	Cymahal	Va	lue	Lloit	Note	
Item	Symbol	Min.	Max.	Unit		
Storage Temperature	T <sub>ST</sub>	-20	+60	°C	(1),(3),(4)	
Storage Humidity	H <sub>ST</sub>	40	70	%RH	(1),(3),(4)	
Operating Ambient Temperature	T <sub>OP</sub>	10	+40	°C	(1),(2),(3),(4)	
Operating Ambient Humidity	НОР	40	70	%RH	(1),(2),(3),(4)	
Optimal Storage Temperature	TST	-10	+35	°C	(1),(3),(4)	
Optimal Storage Humidity	HST	45	65	%RH	(1),(3),(4)	

#### Note (1):

- (a) 70 %RH Max. (Ta  $\leq$  40 °C), 40%RH Min. (Ta  $\leq$  60 °C) where Ta is ambient temperature.
- (b) No condensation and no frost in absolute ratings of Environment.
- Note (2): The temperature of panel display surface area should be 10 °C Min. and 40°C Max. Refresh time depends on operating temperature.
- Note (3): Reddish on the edge of black image is normal at high temperature.
- Note (4): E Ink Material is Moisture and UV sensitive. The absolute rating operating environments describes the boundary conditions for updating the display while the absolute rating storage environment describe the boundary conditions for a display not updating. While displays are rated to perform according to specification for the warranty period at the absolute specified operating environment, the better the storage condition, the better the E Ink displays will perform. Similar to other moisture and UV sensitive components, we recommend that our displays be stored in temperature and humidity control environments, and whenever possible, under above defined Optimal Storage Condition, away from sunlight, to optimize their performance.
- Note (5): The performance of EPD may be degraded under sunlight. Please customer consults PDI if customer wants to use EPD under sunlight.

Rev.: 01 Page: 12 of 31 Date: 2016/08/19



### 2.2 Reliability Test Item

Table 2-2 Reliability Test Items


Item	Test Condition	Note
High Temperature Operation	40 ℃/ 30 %RH for 240h	(1) (2)
Low Temperature Operation	10 ℃ for 240h	(1) (2)
High Temperature/Humidity Operation	40 ℃ / 70%RH for 240h	(1) (2)
High Temperature Storage	60 ℃/ 40 %RH for 240h	(1)(2)(3)
Low Temperature Storage	-20 ℃ for 240h	(1)(2)(3)
High Temperature/Humidity Storage	50 ℃ / 80% RH for 240h	(1)(2)(3)
Temperature Shock (Storage)	-20 °C/30 min ~ 60°C/30min for 100 cycles	(1)(2)(3)
Package Drop Test	Drop from 97cm. (ISTA) 1 corner, 3 edges, 6 sides. One drop for each.	(1)(2)(3)
Package Random Vibration Test	1.15Grms, 1Hz ~ 200Hz. ( ISTA )	(1)(2)(3)

- Note (1): No condensation and no frost during test. End of test, function, mechanical, and optical shall be satisfied with product specification and IIS.
- Note (2): The test result and judgment are based on PDI's 1bit driving waveform, driving fixture and driving system.
- Note (3): Stay white pattern for storage and non-operation test.

### 2.3 Product Warranty

Warranty conditions have to be negotiated between PDI and individual customers. PDI provides 13months warranty for all products which are purchased from PDI.

Rev.: 01 Page: 13 of 31 Date: 2016/08/19





### 3 Electrical Characteristics

### 3.1 Absolute Maximum Ratings of Panel

**Table 3-1 Absolute Maximum Ratings of Panel** 

Doromotor	Coursels al	١	/alue	Unit	Ninto	
Parameter	Symbol	Min Max		Unit	Note	
Logic supply voltage	V <sub>DD</sub> , VDDIO	-0.3	6.0	V		
Ground	GND	-		_	Connect to Ground	

 $Ta = 25 \pm 2$  °C

### 3.2 Recommended Operation Conditions of Panel

Table 3-2 DC Characteristics of Panel

Darameter		Symbol		Value	Unit	Noto	
Pala	Parameter		Min	Тур	Max	UIIII	Note
Operatio	on voltage	V <sub>CC</sub> ,VDD, VDDIO VDDA	2.3	3.0	3.6	V	
Input	High	V <sub>IH</sub>	0.7V <sub>DDIO</sub>	1	$V_{\text{DDIO}}$	V	
Voltage	Low	V <sub>IL</sub>	0	-	0.3V <sub>DDIO</sub>	V	
Output	High	V <sub>OH</sub>	V <sub>DDIO</sub> -0.4	-	-	V	$V_{DDIO} = V_{DD}$ $I_{OH} = 400uA$
Voltage	Low	V <sub>OL</sub>	-	1	0.4	V	$V_{DDIO} = V_{DD}$ $I_{OL} = -400uA$ ,
Input	Current	I <sub>DD</sub> +I <sub>CC</sub>	-	8	-	mA	(1),(2),(3)


 $Ta = 25 \pm 2$  °C

Rev.: 01 Page: 14 of 31 Date: 2016/08/19



Note (1):

Figure 3-1 Test Pattern of Panel

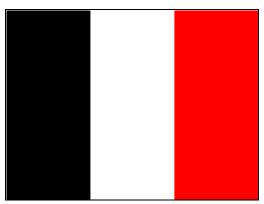


These currents are tested with PDI test jig.

Note (2):

 $V_{DD} = V_{CC} = 3.0V$ 

Figure 3-2 Image Update Current Profile

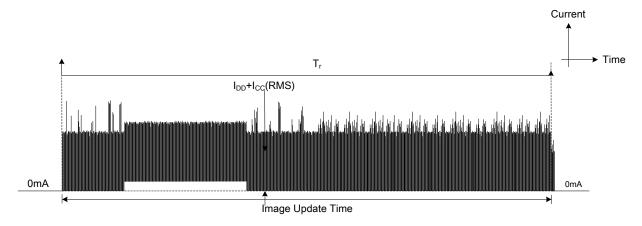

\* T<sub>r</sub>: Refresh time of the image update.

Note (3):  $I_{DD}$ : The current of  $V_{DD} + V_{DDIO}$ .


 $I_{CC}$ : The current of  $V_{CC}$ (EPD Boost Circuit).

Figure 3-3 Current Measurement

Rev.: 01 Page: 15 of 31 Date: 2016/08/19





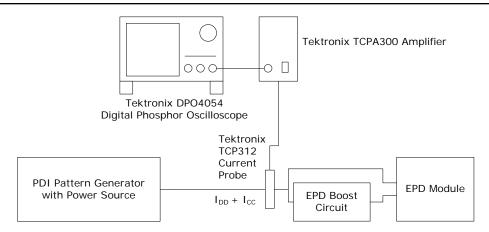


\*Set oscilloscope filter to 250MHz and record length to 1M points.

Rev.: 01 Page: 16 of 31 Date: 2016/08/19



# 4 Application Circuit Block Diagram

### 4.1 Application Circuit Block Diagram

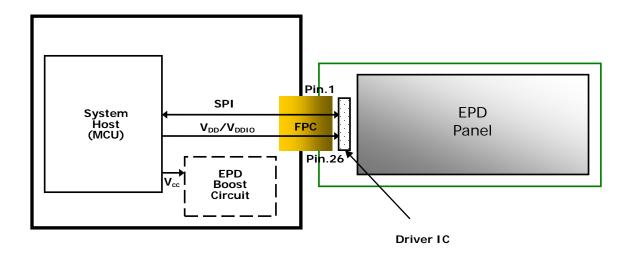

Rev.: 01 Page: 17 of 31 Date: 2016/08/19





# 5 Terminal Pin Assignment

### 5.1 Input Terminal Pin Assignment

Table 5-1 Terminal Pin Assignment

No.	Signal	Туре	Connected to	Function
1	GUARD1	О	System I/O	Glass Breakage Detection H: Normal L: Broken
2	NC	-	-	-
3	GDR	0	Power MOSFET Driver Control	This pin is the N-Channel MOSFET Gate Drive Control.
4	RESE	I	Booster Control Input	This pin is the Current Sense Input for the Control Loop.
5	NC	-	-	-
6	VDHR	С	Capacitor	This pin is the positive source driving voltage for red. A stabilizing capacitor should be connected between VDHR and GND.
7	NC	-	-	Not connected
8	NC	-	-	Not connected
9	BS	I	Ground	This pin is setting panel interface.
10	BUSY_N	0	Device Busy Signal	This pin is Busy state output pin. L: Driver is busy, data/command is transforming. H: Host side can send command/data to driver
11	RST_N	I	System Reset	This pin is reset signal input. Active Low.
12	DC	I	Serial Bus	This pin is Data/Command control. L: command H: data
13	CSB	I	Serial Bus	This pin is the chip select.
14	SCL	I	Serial Bus	Serial communication clock input

Rev.: 01 Page: 18 of 31 Date: 2016/08/19



Doc. No.1P112-00

No.	Signal	Туре	Connected to	Function
15	SDA	1/0	Serial Bus	Serial communication data input
16	VDDIO	Р	Power Supply	Power supply for interface logic pins & I/O.
17	VDD	Р	Power Supply	Power supply for digital.
18	GND	Р	Ground	-
19	VDDD	Р	Capacitor	This pin is the internal LDO(1.8V)
20	NC	-	1	-
21	VDH	C	Capacitor	This pin is the positive source driving voltage. A stabilizing capacitor should be connected between VDH and GND.
22	VGH	С	Capacitor	This pin is the positive gate driving voltage. A stabilizing capacitor should be connected between VGH and GND.
23	VDL	С	Capacitor	This pin is the negative source driving voltage. A stabilizing capacitor should be connected between VDL and GND
24	VGL	С	Capacitor	This pin is the negative gate driving voltage. A stabilizing capacitor should be connected between VGL and GND.
25	VCOM	С	Capacitor	This pin is the VCOM driving voltage A stabilizing capacitor should be connected between VCOM and GND.
26	GUARD2	О	System I/O	Glass Breakage Detection H: Normal L: Broken

Note:

Type: I:Input O:Output


C: Capacitor P: Power

Rev.: 01 Page: 19 of 31 Date: 2016/08/19



#### 5.2 Reference Circuit

Figure 5-1 EPD Reference Circuit

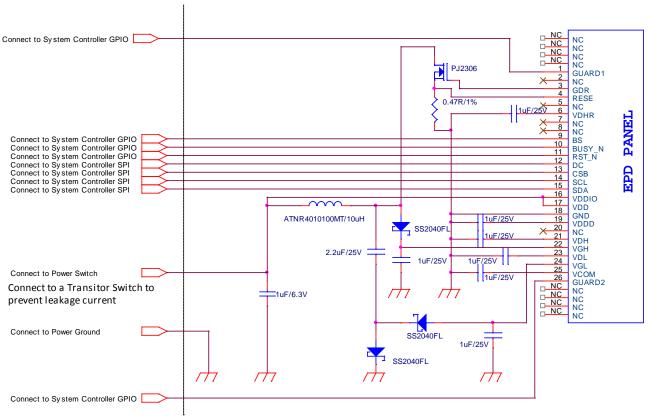

Note (1): HRS FH34SRJ 34S and STARCONN 6700S34 are 34-pins connectors. The middle 26 pins are used to connect FPC pads of EPD. The other 8 pins are used as dummy pins.

Туре	Part	Vendor
Inductor	10uH ATNR4010100MT +-20% 0.8A H=0.9mm	ARLITECH
Transistor	PJ2306 SOT-23 N-Channel 30V/3.2A	PANJIT
Diode	SS2040FL SOD-123FL	PANJIT

#### Note:


- (1) PJ2306 is a N-Channel Power MOSFET. The specification of selection criteria are  $R_{DS}$ <100 mohm (the lower the better),  $V_{DSS}$ =30V,  $V_{GS-th}$ <2.5V@250uA.
- (2) SS2040FL is a Schottky diode needs the  $V_f$  as lower as possible, 0.2 to 0.4V and the repetitive peak reverse voltage > 25V.

Rev.: 01 Page: 20 of 31 Date: 2016/08/19



### 5.3 Glass Breakage Detection

Breakage detection is a new feature that can let user know whether the glass substrate is broken. Before update, the system controller can check the signal on Guard Ring (Guard1 and Guard2). If this signal is not  $V_{DDIO}$ , the glass is possibly broken. In this case, the EPD may be not able to display image correctly. This feature is very critical for the bi-stable displays.

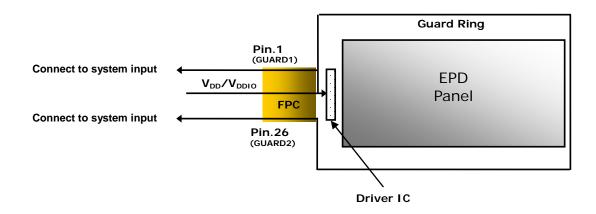

Note (1): If there is not enough system controller GPIO. Using pin 26 of FPC can have larger coverage to detect breakage.

Note (2): The GPIOs must add a resistor to ground when the GPIO don't have the internal resistor to ground.

Rev.: 01 Page: 21 of 31 Date: 2016/08/19





# **6 Optical Characteristics**

#### 6.1 Measurement Conditions

Table 6-1 Optical Measurement Conditions

Item	Symbol	Value	Unit
Ambient Temperature	Та	25±2	°C
Ambient Humidity	На	50±10	%RH
Supply Voltage	$V_{DD}$ , $V_{DDIO}$ , $V_{DDA}$	3.0	V

Note (1): Image is updated with above condition.

### 6.2 Optical Specification

#### 6.2.1 Optical

Table 6-2 Optical Measurement with D65 Light Source

Item	Color	Symbol		Rating			Note
rtem	COIOI	Symbol	Min.	Тур.	Max.	Unit	Note
Contrast ratio	Black/ White	CR	1	22:1	ı	-	$\theta x = \theta y = 0$ (1),(2),(5),(6)
Refresh time	Black/ White/ Red	Tr	-	11	-	sec	(3),(4),(6)
	White	L*	-	70	-		
White state	White	a*		0		-	$\theta x = \theta y = 0$ (1),(2),(6)
	White	b*	-	5.0	-		
Dod state	Red	L*	-	27.7	-		$\theta x = \theta y = 0$
Red state	Red	a*		38.7		-	(1),(2),(6)


Rev.: 01 Page: 22 of 31 Date: 2016/08/19




	Red	b*	-	22.2	-		
Reflectance	White	R%	-	41	-	%	(1),(2),(6)

Note (1): Panel is driven by PDI waveform without masking film and optical measurement by CM-700D with D65 light source and SCE mode.

Figure 6-1 Optical Measurement

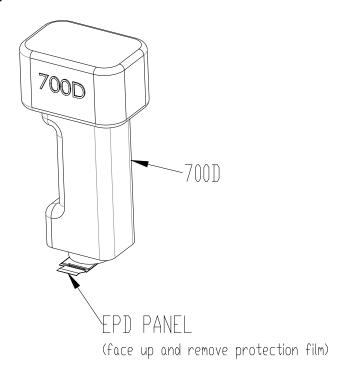

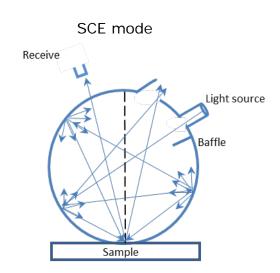


Rev.: 01 Page: 23 of 31 Date: 2016/08/19



Note (2): Definition of Viewing Angle ( $\theta x$ ,  $\theta y$ ):

Figure 6-2 Definition of Viewing Angle to Measure Contrast Ratio

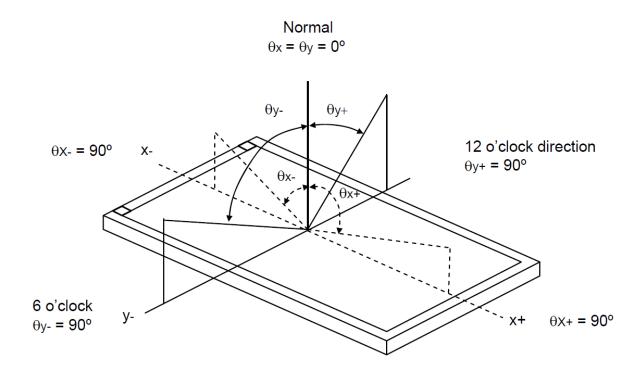

- Note (3): Refresh time is the time that e-paper particles move not including the power on and off time. The refresh time is measured at 25°C. The refresh time and contrast ratio vary due to different lot of film, display performance requirements, and ambient temperatures.
- Note (4): Tr is the refresh time. For an image with Red, Red/White, Red/Black, or Red/Black/White, the total update time is (Tr).
- Note (5): Contrast ratio (C.R.): The Contrast ratio is calculated by the following expression. C.R. = (R% White) / (R% Black).
- Note (6): Optical data is measured at 60 seconds after refresh with PDI's global update procedure.

Rev.: 01 Page: 24 of 31 Date: 2016/08/19



#### 6.2.2 Ghosting

Below are test method to verify if ghosting is within an acceptable range. The measured data (L\*, a\*, b\*) to calculate color different,  $\triangle E_{00}$  (CIEDE 2000). The condition of measurement is to follow " Table 6-1 Optical Measurement Conditions".

Ghosting Measurement

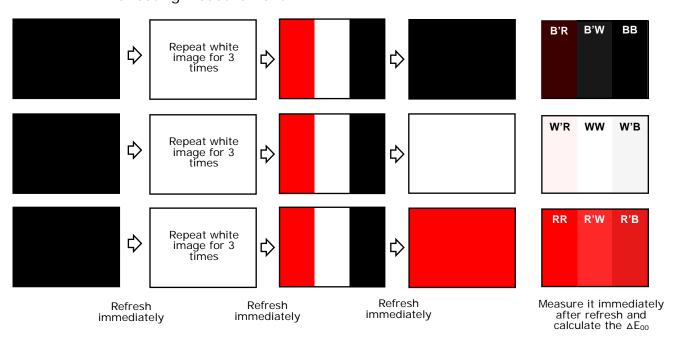


Table 6-3 Measurement of Ghosting

Itom	Rating					
Item	Min.	Тур.	Max.			
B'W∆E <sub>00</sub>	-	-	2			
W'B△E <sub>00</sub>	-	-	2			
R'W△E <sub>00</sub>	-	-	TBD			
W'R△E <sub>00</sub>	-	-	TBD			
B'R△E <sub>00</sub>	-	-	TBD			
R'B△E <sub>00</sub>	-	-	TBD			


Note: Panel is driven by PDI's tooling system and PDI's waveform without masking film and optical measurement by CM-700D with D65 light source and SCE mode.

Rev.: 01 Page: 25 of 31 Date: 2016/08/19




# 7 Packing

Figure 7-1 Packing Diagram

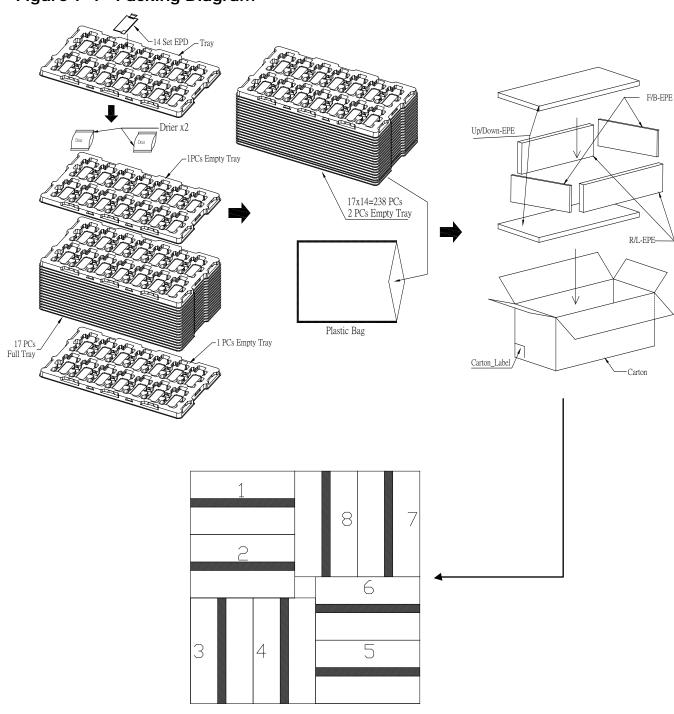

Rev.: 01 Page: 26 of 31 Date: 2016/08/19




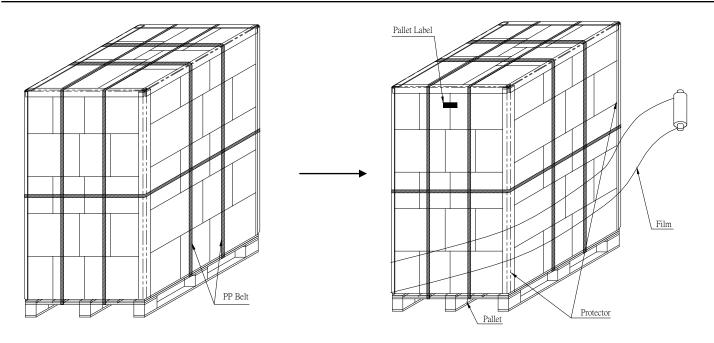

238(pcs)x40(BOX)=9,520pcs

	2.87" EPD BOX
N.W. :	1.29 Kg
G.W. :	4.76 Kg

# Sea / Land / Air Transportation

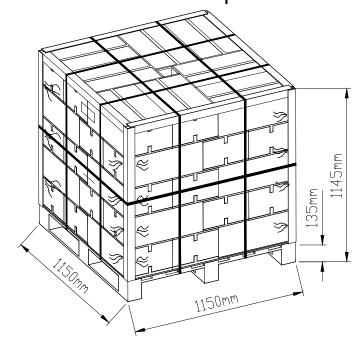

Rev.: 01 Page: 27 of 31 Date: 2016/08/19



#### 8 Precautions


- (1) The EPD Panel / Module is manufactured from fragile materials such as glass and plastic, and may be broken or cracked if dropped. Please handle with care. Do not apply force such as bending or twisting to the EPD panel. Please put on gloves to handle EPD to avoid slash.
- (2) It is recommended to assemble or install EPD panels in a clean working area. Dust and oil may cause electrical shorts or degrade / scratch / dent the protection sheet film.
- (3) Do not apply pressure to the EPD panel in order to prevent damaging it.
- (4) Do not connect or disconnect the interface connector while the EPD panel is in operation.
- (5) Please support as the bezel with your finger while connecting the interface cable such as the FPC.
- (6) Do not stack the EPD panels / Modules.
- (7) Do not press the FPC on the glass edge or Pull FPC up / down to 90°.
- (8) Do not touch the FPC lead connector.
- (9) Do not touch IC bonding area. It may scratch TFT lead or damage IC function.
- (10) Wear a Wrist Strap (Grounding connect) when handling and during assembly. Semiconductor devices are included in the EPD Panel / Module and they should be handled with care to prevent any electrostatic discharge (ESD). (An Ion Fan may be needed in assembly operation to reduce ESD risk.)
- (11) Keep the EPD Panel / Module in the specified environment and original packing boxes when storage in order to avoid scratching and keep original performance.
- (12) Do not disassemble or reassemble the EPD panel.
- (13) Use a soft dry cloth without chemicals for cleaning. Please don't press hard for cleaning because the surface of the protection sheet film is very soft and without hard coating. This behavior would make dent or scratch on protection sheet.
- (14) Please be mindful of moisture to avoid its penetration into the EPD panel, which may cause damage during operation.
- (15) It's low temperature operation product. Please be mindful the temperature different to make frost or dew on the surface of EPD panel. Moisture may penetrate into the EPD panel because of frost or dew on surface of EPD panel, and makes EPD panel damage.
- (16) If the EPD Panel / Module is not refreshed every 24 hours, a phenomena known as "Ghosting" or "Image Sticking" may occur. It is recommended that customer refreshed the ESL / EPD Tag every 24 hours in use case. It is recommended that customer ships or stores the ESL / EPD Tag with a completely white image to avoid this issue.
- (17) High temperature, high humidity, sunlight or fluorescent light may degrade the EPD panel's performance. Please do not expose the unprotected EPD panel to high temperature, high humidity, sunlight, or fluorescent for long periods of time.
- (18) The label ink used for marking the Panel ID number is erased easily by solvent. Please avoid using solvent to clean the EPD panel.
- (19) The EPD is vacuum packed.
- (20) Before approved by PDI and customer, products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- (21) PDI makes every attempt to ensure that its products are of high quality and reliability. However, contact PDI sales office before using the product in an application that demands

Rev.: 01 Page: 28 of 31 Date: 2016/08/19
This document is the exclusive property of PDI and shall not be reproduced or copied or transformed to any other format without





- especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- (22) Design your application so that the product is used within the ranges guaranteed by PDI particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. PDI bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail safes, so that the equipment incorporating PDI product does not cause bodily injury, fire or other consequential damage due to operation of the PDI product.
- (23) This product is not designed to be radiation resistant.
- (24) Please keep R≥1.0mm when bend for assembly.



Rev.: 01 Page: 29 of 31 Date: 2016/08/19



### 9 Definition of Labels

Figure 9-1 Model Labels


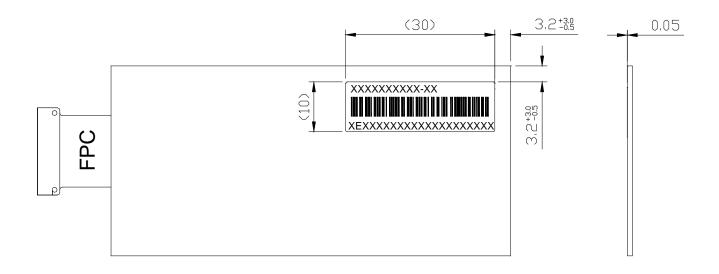


Figure 9-2 Definition of Model Labels

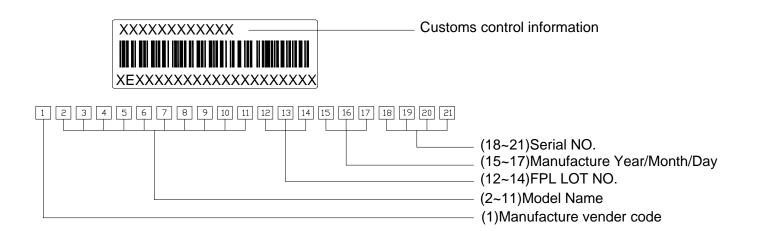


Rev.: 01 Page: 30 of 31 Date: 2016/08/19



Figure 9-3 Carton Label

Bar Code=Model Name.+Carton Serial No.+Q'TY.(Code 128)

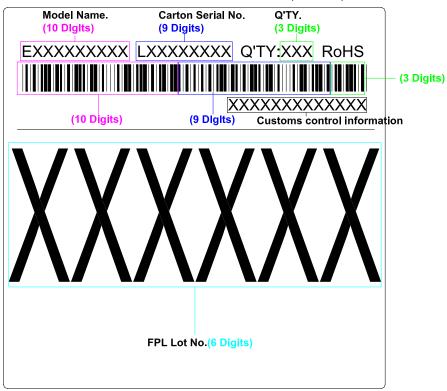

# **Carton Label**

Figure 9-4 Pallet Label



Bar Code=Model Name.+Pallet Serial No.+Q'TY.(22 Digits)

# **Pallet Label**

Rev.: 01 Page: 31 of 31 Date: 2016/08/19